

SERVICE
MANUAL **105B**



marantz.

model 105B

Fm / Am Stereophonic Tuner

TABLE OF CONTENTS

SECTION	PAGE
Introduction	1
AM Tuner	1
FM Tuner	1
AM Alignment Procedure	3
FM Alignment Procedure	3
Test Equipment Required for Servicing	4
Parts List	13 ~ 17
Technical Specifications	18

LIST OF ILLUSTRATIONS

FIGURE	PAGE
1. Dial Stringing	5
2. Front Panel Adjustments and Component Locations	6
3. Main Chassis Component Locations (Top View)	6
4. Rear Panel Adjustment and Component Locations	7
5. Main Chassis Component Locations (Bottom View)	7
6. FM/AM Tuner Assembly P100 Component Locations	8
7. FM, AM, Mono and Muting Switch Assembly P300 Component Locations	8
8. Power Supply Assembly P400 Component Locations	8
9. Schematic Diagram	9, 10
10. Exploded Mechanical Diagram	11, 12

TABLE

1. Test Equipment Required for Servicing	4
--	---

INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for Marantz Model 105B Stereophonic Tuner.

Servicing information and voltage data included in this manual are intended for use by the knowledgeable and experienced technician only. All instruction should be read carefully. No attempt should be made to proceed without a good understanding of the operation in the tuner.

The part lists furnish information by which replacement part may be ordered from the Marantz Company. A simple description is included for parts which can be usually be obtained through local suppliers.

The Model 105B is a tuner version of the Marantz's Model 2015 Tuner/Amplifier and almost the same circuitry as used in the Model 2015 is employed except the audio Amplifier, and power supply circuit.

1. AM Tuner

All components except ferrite bar antenna are mounted on a printed circuit board P100.

The AM signals induced in a ferrite bar antenna are applied to the base of converter transistor H113 through a capacitor of C171, while the local oscillator voltage is injected to the emitter of H113 through a capacitor C172. Both AM signals and oscillating voltage are mixed at the base-emitter junction and converted into 455KHz intermediate frequency. The resulting IF signal is applied to the first IF transformer L116 consisting of one ceramic filter and two tuned circuits.

The output of L116 is led to the transistor H104 which in turn apply its output to the transistor of next stage H105. The fully amplified IF output is then applied to the diode H123 to detect audible signal through the detector transformer L117. The detected audio signal is filtered and the final audio output is obtained from pin terminal J118 and applied: to the output jacks through the function switch.

The DC component of the detected IF signal is used as a AGC voltage to control emitter current of H104 through the resistor R185. A part of IF signal output is also applied to the diode H124 through a capacitor C180 and rectified to obtain DC current for energizing the AM signal strength meter M001.

1.1 Suggestions for AM Tuner trouble shooting

Check for broken AM bar antenna, next try to tune station by rotating fly-wheel tuning knob slowly and observe the AM signal strength meter whether it deflects or not. If the signal strength meter gives a deflection at several frequencies received, no failure may exist in the stages at least preceding final IF transformer L117. Next connect a oscilloscope to the pin terminal J118 and check for audio signals with the tuning meter deflected. If the signal strength meter does not deflect, check the local oscillator circuit. Normal oscillating voltage at the hot end of the oscillator tuning capacitor is about 2 or 3 volts, varying with tuning capacitor position. When measuring oscillating voltage use a RF VTVM, no circuit tester gives correct indication. If the local oscillator voltage is normal, check all voltage distribution in the AM circuits by using a DC VTVM and compare the measured values with those given in the schematic diagram.

2. FM Tuner

All components are mounted on a printed circuit board P100.

FM signals induced by a FM antenna are led to FM antenna coil L101.

These signals are then applied to the FET RF amplifier which in turn applies its output to the next transistor mixer H102 through a high Q tuned circuit.

The mixer convert its input signal into 10.7MHz intermediate frequency and amplifies it at the same time. The H103 is a local oscillator and its output is injected into the base of mixer transistor, the injection voltage is about 40mV.

The 10.7 MHz front end output is led to the next IF section. The IF section consists of five stage of IF amplifier and one stage of sub IF amplifier. Two pieces of ceramic filters are also used to obtain high selectivity, a pair of symmetrical diode limiters are also employed for the best limiting characteristics, improved capture ratio and good AM suppression. A part of IF amplifier H105 output is rectified by the diode H115, H116 and its DC output is fed back to the gate of FET RF amplifier to decrease the gain with increased signal strength.

2.1 Muting and Auto-Stereo Switching Circuits

The muting circuit consisting of all solid-state electrical switching has been incorporated in the Model 105B.

The DC voltage obtained by rectifying the sub IF output signal from the H109 is applied to the base of H110 and turns on it, if the sub IF output is greater than predetermined level (muting threshold level).

When H110 turns on, the muting switch transistor H111 is turned on, thus decreasing the emitter collector resistance to near zero ohm and allowing emitter current path to the Final IF amplifier H108.

When the input signal is lower than the predetermined level, the DC output obtained is small and can not turn on the H110, thus the H110 keeps its turn off state and this makes the switch transistor keep H111 turn off, then no emitter current is supplied to the H108 and signals below the threshold level are muted out.

The muting threshold level can be varied by adjusting the trimming resistor R153.

The DC voltage obtained is also used to make the Auto-Stereo switching transistor H112 turn on and off.

2.2 MPX Stereo Decoding Circuit

A Non-equalized audio signal from the FM detector is applied through the phase adjuster network of C148 and R161 to input terminal pin ① on the MPX decoder IC H114. The MPX decoder IC consists of a stereo decoder and postamplifier for the output. The right and left channel signals decoded by the stereo decoder H114, appear at pin ⑩ (right channel) and pin ⑪ (left channel), respectively. These signals are passed through the low-pass filters and de-emphasis networks to eliminate undesirable residual switching signals and are then delivered to postamplifier input pin ⑤ (right channel) and pin ⑦ (left channel), respectively. The signals amplified in the postamplifiers to the required level (approximately 10 dB) are delivered to pin ⑥ (right channel) and pin ⑧ (left channel), and are then passed through C169 and C168 to pin terminals J114 and J115, hence, through function switches to the "OUTPUT" terminal. Pin ⑮ on the MPX IC H114 is connected through R163 to the collector of the autostereo switch transistor H112, which turns on or off according to the incoming FM signal strength, thereby automatically switching between the stereophonic and monaural operations. The H112 turns on or off in accordance with whether the FM signal strength is more or less than approximately 25 μ V.

2.3 Suggestion for Trouble Shooting of FM Tuner

2.3.1 Symptom: No FM Reception

First turn on the power switch and try to tune FM stations. Rotate the fly-wheel tuning knob slowly and observe the FM TUNING meter. If the TUNING meter deflect at several frequencies received, the tuner circuits preceding the discriminator circuit may have no failure. When no reading is obtained in the meter, check FM local oscillator circuit, using a RF VTVM.

The normal local oscillator voltage is one or two volts (rms) at the tuning capacitor, depending on the tuning capacitor position. If the local oscillator voltage is normal, next check all voltage distribution in the FM Front End and IF amplifier unit and compare them with those shown in the circuit diagram. When TUNING meter deflects but no sound is obtained, check audio circuits, using high sensitive oscilloscope.

2.3.2 Symptom: No Stereo Separation

First check the "MONO" switch is in normal out position. Connect a FM RF signal generator output modulated by a stereo modulator to the rear FM antenna terminals, and check the stereo beacon is turned on or not. If not turned on, check for 19 KHz pilot signal and 38 KHz switching signal, using an oscilloscope.

3. AM Alignment Procedure

3.1 AM IF Alignment

1. Connect a sweep generator to the test point ① or J107 and an alignment scope to the test point ②.
2. Rotate each core of IF transformer L116 and L117 for maximum height and flat top symmetrical response.

3.2 AM Frequency Range and Tracking Alignment

1. Set AM signal generator to 525 KHz. Turn the tuning capacitor fully closed (place the tuning pointer at the low end.) and adjust the oscillator coil L115 for maximum audio output.
2. Set the signal generator to 1650 KHz. Place the tuning pointer in the high frequency end and adjust the oscillator trimmer on the oscillator tuning capacitor (CA-2) for maximum audio output.
3. Repeat the step 1 and 2 until no further adjustment is necessary.
4. Set the generator to 600 KHz and tune the receiver to the same frequency and adjust a slug core of AM ferrite rod antenna for maximum output.
5. Set the generator to 1400 KHz and tune the receiver to the same frequency and adjust the trimming capacitors of Antenna (CA-1) for maximum output.
6. Repeat the step 4 and 5 until no further adjustment is necessary.

Note: During tracking alignment reduce the signal generator output as necessary to avoid AGC action.

4. FM Alignment Procedure

1. Connect a FM signal generator to the FM antenna terminals and a oscilloscope and an audio distortion analyzer to the tape output jacks on the rear panel.
2. Set the FM SG to 87.5 MHz and provide about 3 to 5 μ V. Place the tuning pointer at the low frequency end by rotating the tuning knob and adjust the core of oscillator coil L103 to obtain maximum audio output.
3. Set the FM SG to 108.5 MHz and provide about 3 to 5 μ V output. Rotate the tuning knob and place the tuning pointer at the high frequency end and adjust the trimming capacitor C187 for Maximum output.
4. Repeat the step 2 and 3 until no further adjustment is necessary.
5. Set the FM SG to 90 MHz and tune the receiver to the same frequency. Decrease signal generator output until the audio output level decreases with the decreasing generator output. Adjust the antenna coil L101, RF coil L102 and IF transformer L105 for minimum audio distortion.
6. Set the FM SG to 106 MHz and tune the receiver to the same frequency. Adjust the trimming capacitor CF-1, CF-2 for minimum distortion.
7. Repeat the step 5 and 6 until no further adjustment is necessary.
8. Connect a DC VTVM with ± 0.5 volt range selected to the test point ③ (J120) and adjust the secondary core (upper) of discriminator transformer L107 so that no voltage reading is obtained on the VTVM at no signal.

Next set the FM SG to 98 MHz and increase the output level to 1 K μ V, then tune the receiver to the same frequency so that no deflection is obtained on the VTVM.

Adjust primary core (bottom) of L107 for minimum distortion, and adjust the L108 for the maximum reading on the VTVM connected to the J109.

4.1 STEREO Separation Alignment

1. Set the FM SG to provide 1 K μ V at 98 MHz.

Tune the receiver to the same frequency perfectly (so that the VTVM connected to the test point ⑤ gives no reading).

2. Modulate the FM SG with stereo composite signal consisting of subchanged signal only (of course a pilot signal must be included).

Adjust the core of L110 for maximum audio output, then, modulate the FM SG with a stereo composite signal consisting of L or R channel only, and adjust the trimming resistor R161 for maximum and equal separation in both channels.

4.2 Muting Circuit Alignment

1. Set the FM SG output to provide 25 μ V (IHF) at 98 MHz and tune the receiver to the same frequency.

Adjust the trimming resistor R153 for the threshold level of 25 μ V (during this adjustment turn the MUTING pushswitch "on").

5. Test Equipment Required for Servicing

Table 1 lists the test equipment required for servicing the Model 105B Tuner.

Item	Manufacturer and Model No.	Use
AM Signal Generator		Signal source for AM alignment
Test Loop		Used with AM Signal generator
FM Signal Generator	Less than 0.3% distortion	Signal source for FM alignment
Stereo Modulator	Less than 0.3% distortion	Stereo separation alignment and trouble shooting
Audio Oscillator	Weston Model CVO-100P, less than 0.02% residual distortion is required	Sinewave and squarewaves signal source
Oscilloscope	High sensitivity with DC horizontal and vertical amplifiers	Waveform analysis and Trouble Shooting, and ASO alignment
VTVM	With AC, DC, RF range	Voltage measurements
Circuit Tester		Trouble Shooting

Table 1. Test Equipment Required for Servicing

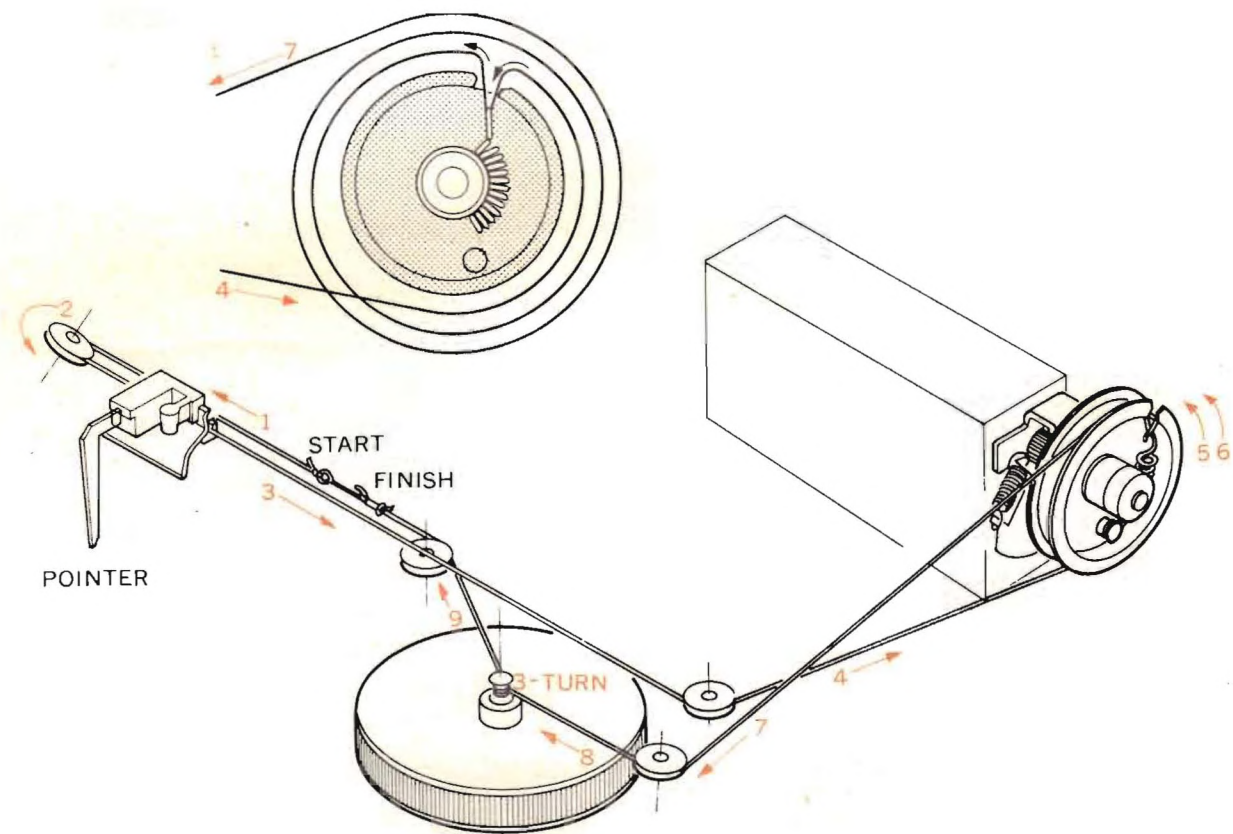


Figure 1. Dial Stringing

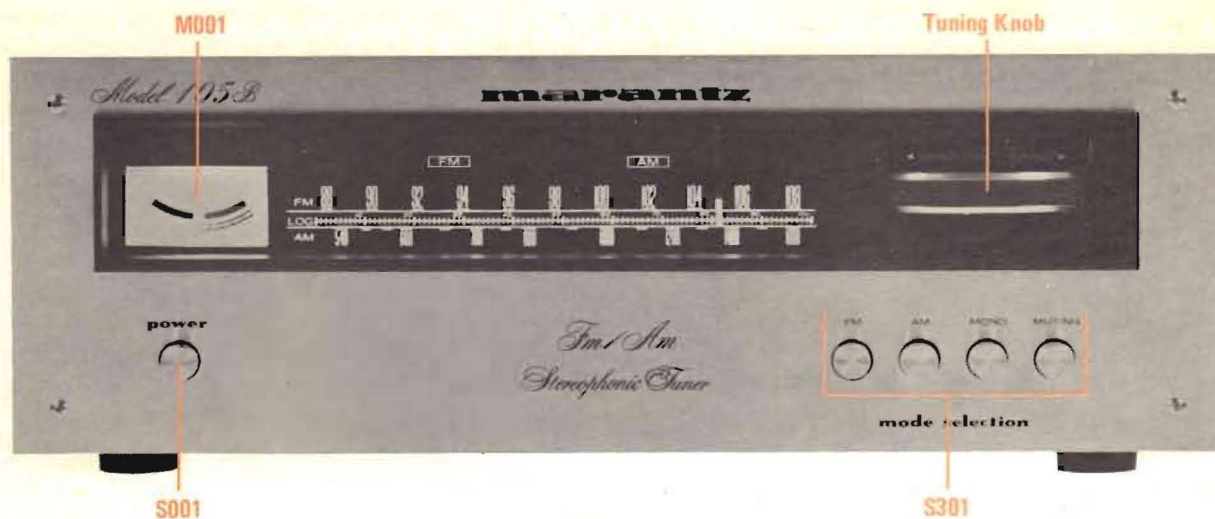


Figure 2. Front Panel Adjustments and Component Locations

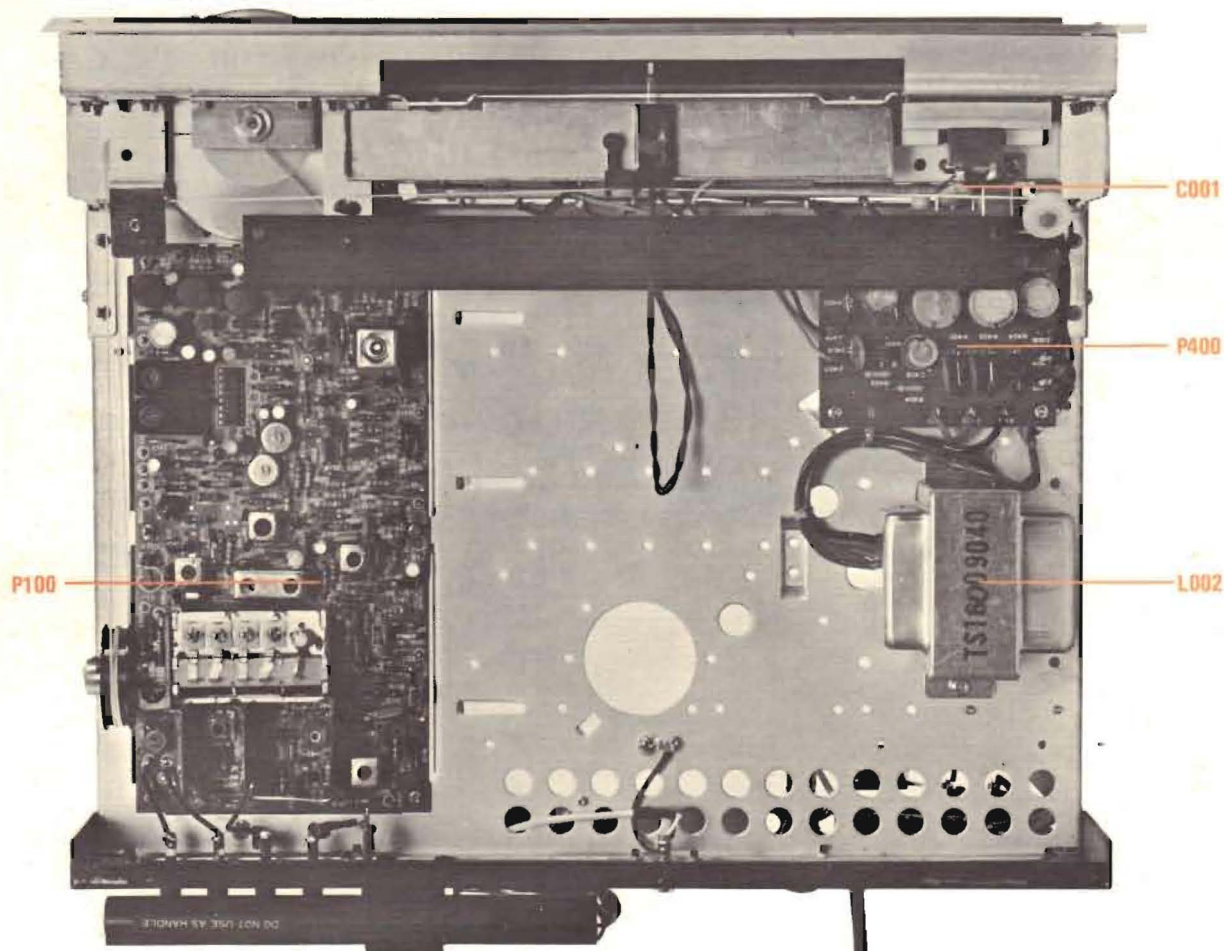


Figure 3. Main Chassis Component Locations (Top View)

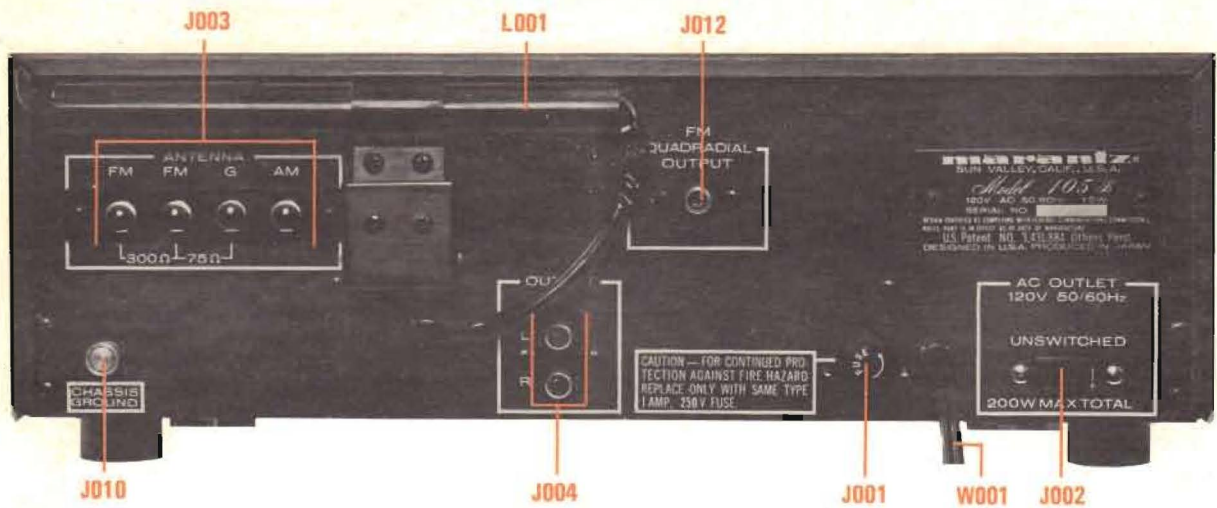


Figure 4. Rear Panel Adjustment and Component Locations

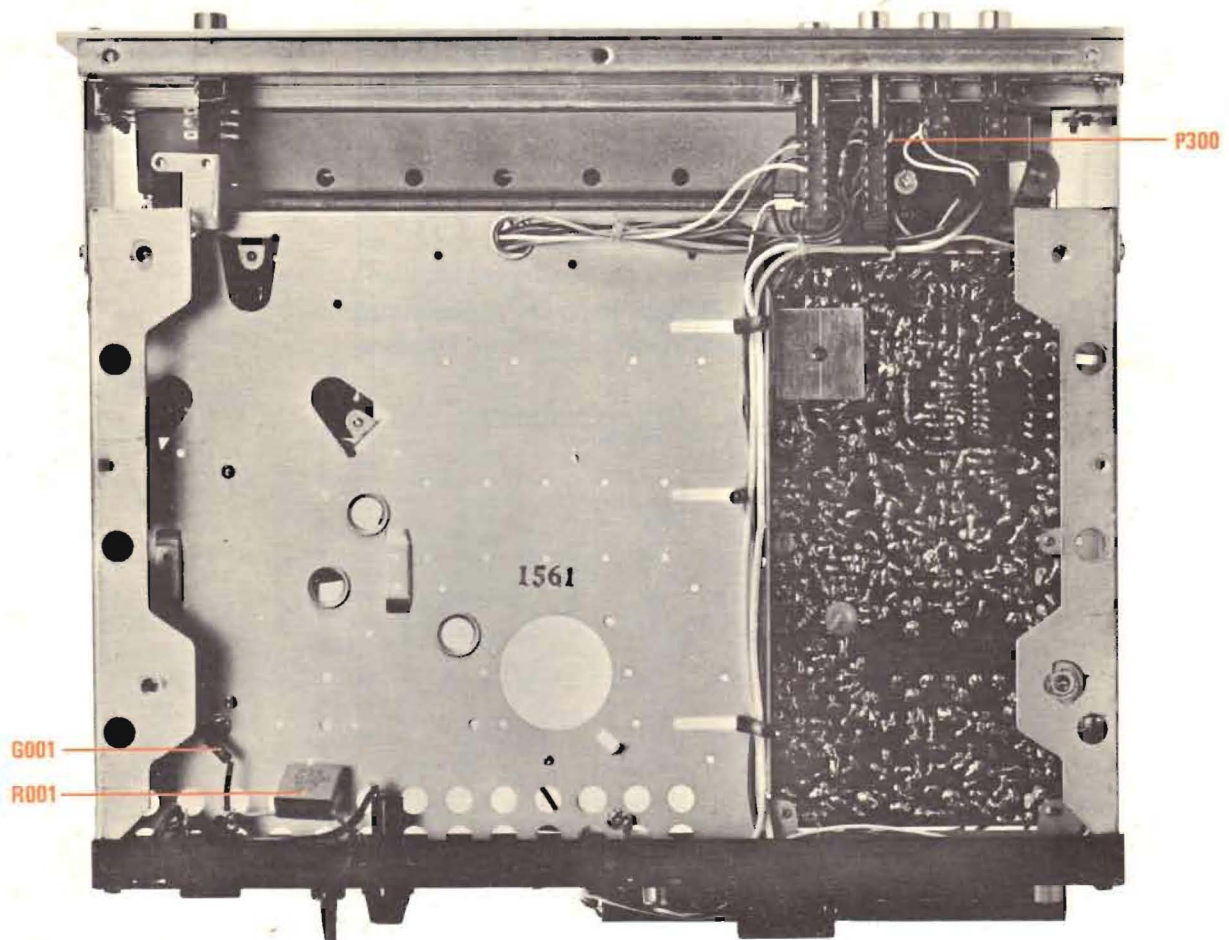


Figure 5. Main Chassis Component Locations (Bottom View)

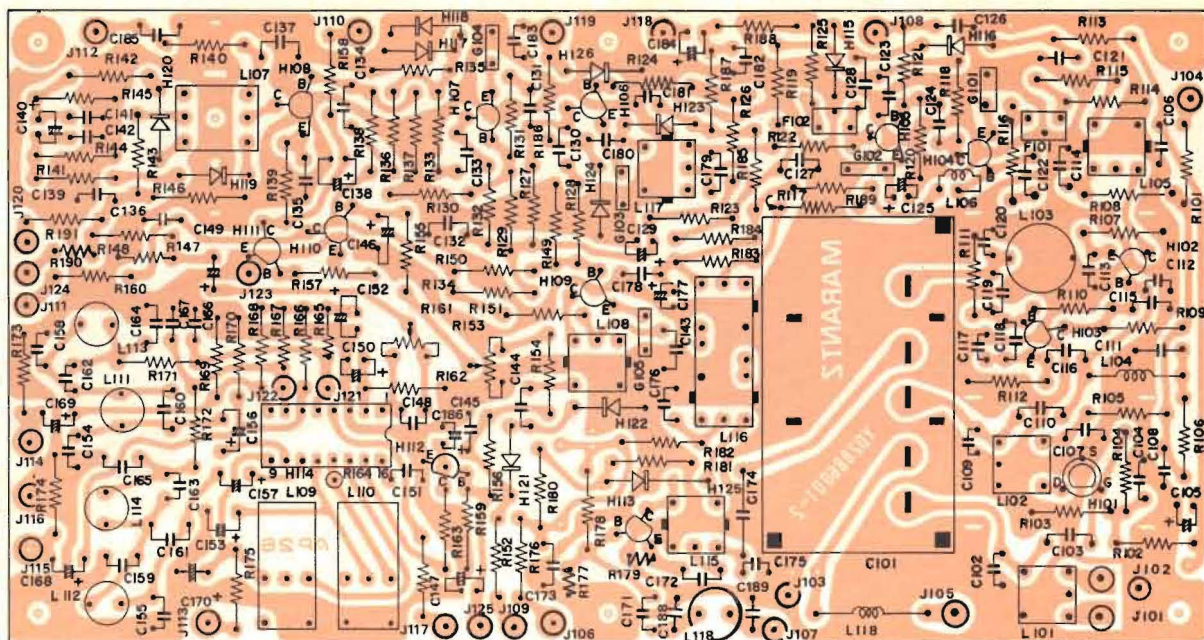


Figure 6. FM/AM Tuner Assembly P100 Component Locations

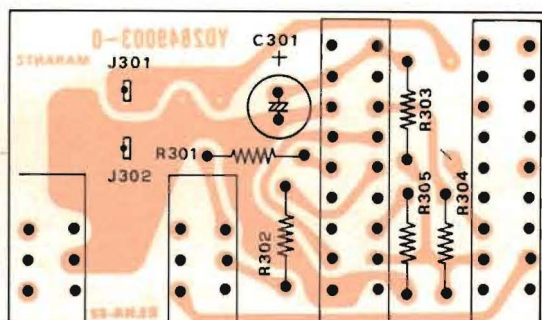


Figure 7. FM, AM, Mono and Muting Switch Assembly P300 Component Locations


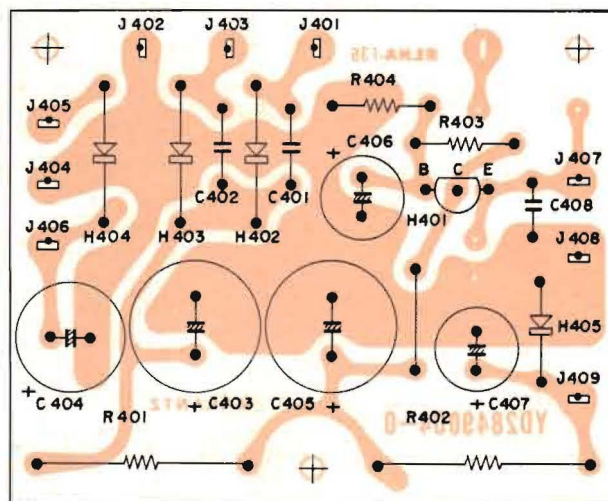


Figure 8. Power Supply Assembly P400 Component Locations

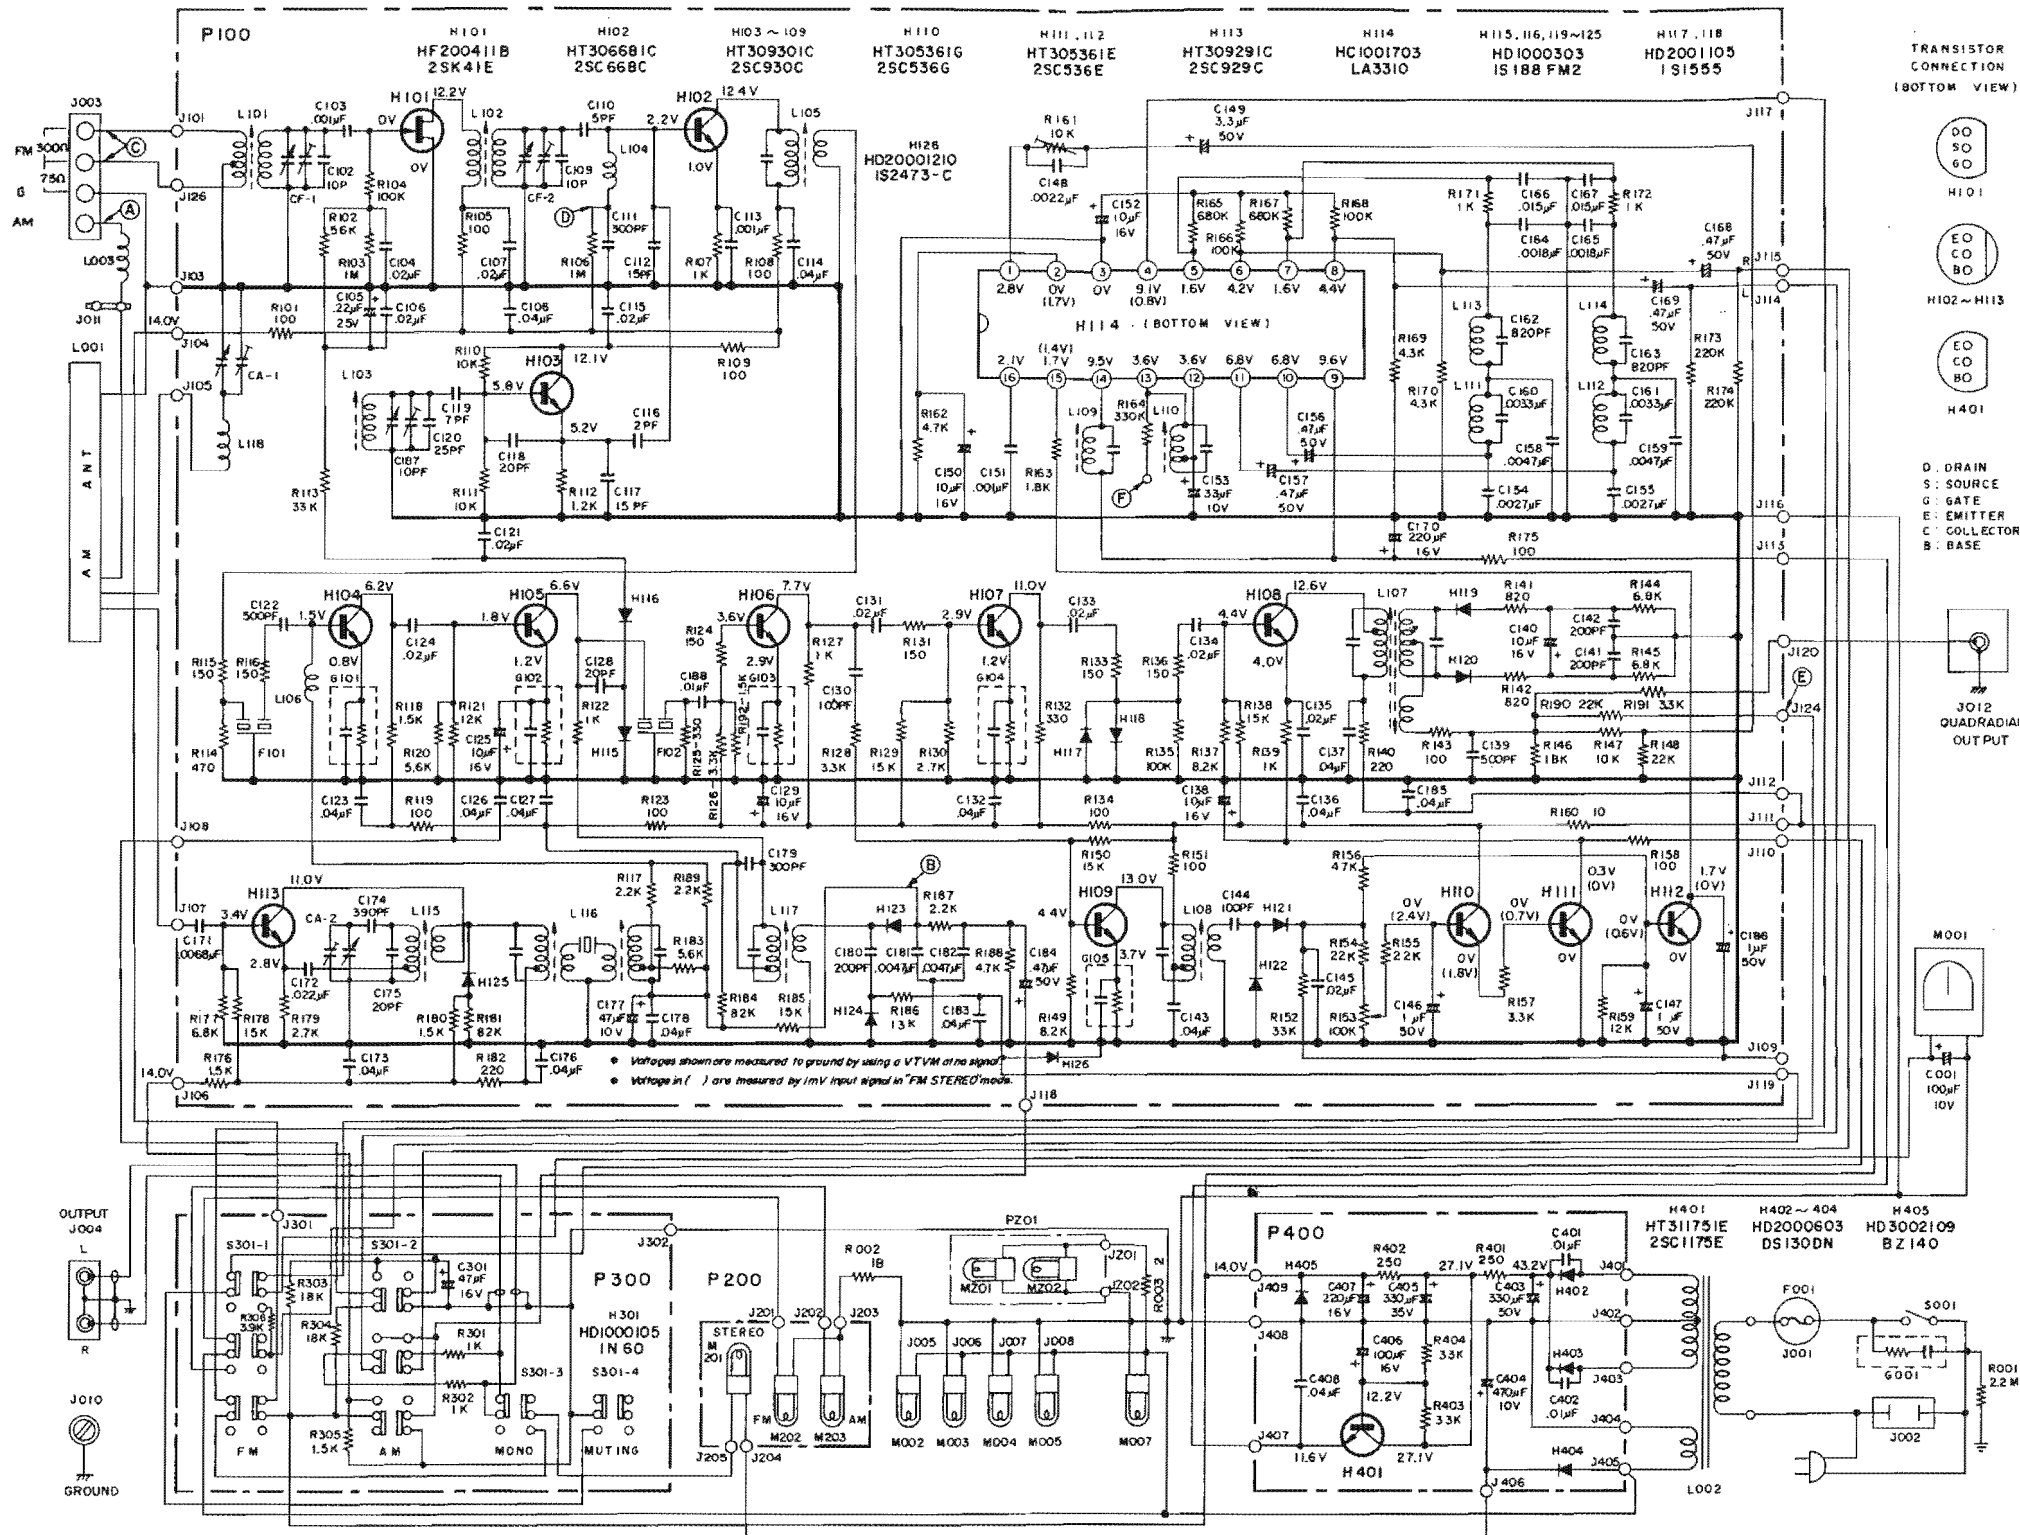

PARTS LIST

REF. DESIG.	PART NO.	DESCRIPTION	REF. DESIG.	PART NO.	DESCRIPTION
A	284906340	Front Panel Assembly	R126	RT0533214	3.3K Ω
0103	284906301	Escutcheon	R127	RT0510214	1K Ω
0104	282740101	Frame	R128	RT0533214	3.3K Ω
0105	282715801	Window	R129	RT0515314	15K Ω
0106	281825905	Bush x 5	R130	RT0527214	2.7K Ω
0108	284905301	Cover			
B	285027340	Fly Wheel Assembly	R131	RT0515114	150 Ω
0427	257706302	Escutcheon x 2	R132	RT0533114	330 Ω
0429	257727301	Fly Wheel	R133	RT0515114	150 Ω
0431	285011201	Shaft	R134	RT0510114	100 Ω
0607	53110603E	Hexagon Nut	R135	RT0510414	100K Ω
0609	54020601E	Flat Washer P	R136	RT0515114	150 Ω
			R137	RT0582214	8.2K Ω
C	120200640	String Assembly	R138	RT0515314	15K Ω
0512	120225801	Hook	R139	RT0510214	1K Ω
0513	72080802A	String	R140	RT0522114	220 Ω
D	285010341	Pointer Assembly	R141	RT0582114	820 Ω
0526	281810301	Pointer	R142	RT0582114	820 Ω
0527	285010301	Pointer	R143	RT0510114	100 Ω
0528	281805301	Cover	R144	RT0568214	6.8K Ω
M007	IN1008030	Lamp	R145	RT0568214	6.8K Ω
			R146	RT0518314	18K Ω
E	284916040	Rear Panel Assembly	R147	RT0510314	10K Ω
0703	284916001	Bracket	R148	RT0522314	22K Ω
0821	55060365S	T.R. Rivet x 2	R149	RT0582214	8.2K Ω
J002	YJ0400018	Jack	R150	RT0515314	15K Ω
P100	YD2886001	P.W. Board, Tuner	R151	RT0510114	100 Ω
	YD2849101	P.W. Board Assembly	R152	RT0533314	33K Ω
			R153	RA0104015	Trimming, 100K Ω (B)
			R154	RT0522314	22K Ω
			R155	RT0522314	22K Ω
			R156	RT0547314	47K Ω
			R157	RT0533214	3.3K Ω
			R158	RT0510114	100 Ω
			R159	RT0518314	18K Ω
			R160	RT0510014	10 Ω
		RESISTORS	R161	RA0103020	Trimming, 10K Ω (B)
		All resistors are $\pm 5\%$ and $\frac{1}{4}W$, unless otherwise indicated.	R162	RT0547214	4.7K Ω
R101	RT0510114	100 Ω	R163	RT0515214	1.5K Ω
R102	RT0556314	56K Ω	R164	RC1033412	330K $\Omega \pm 10\%$, $\frac{1}{4}W$
R103	RT0510514	1M Ω	R165	RT0568414	680K Ω
R104	RT0510414	100K Ω	R166	RT0510414	100K Ω
R105	RT0510114	100 Ω	R167	RT0568414	680K Ω
R106	RT0510514	1M Ω	R168	RT0510414	100K Ω
R107	RT0510214	1K Ω	R169	RT0543214	4.3K Ω
R108	RT0510114	100 Ω	R170	RT0543214	4.3K Ω
R109	RT0510114	100 Ω			
R110	RT0510314	10K Ω	R171	RT0510214	1K Ω
R111	RT0510314	10K Ω	R172	RT0510214	1K Ω
R112	RT0512214	1.2K Ω	R173	RT0522414	220K Ω
R113	RT0533314	33K Ω	R174	RT0522414	220K Ω
R114	RT0547114	470 Ω	R175	RT0510114	100 Ω
R115	RT0515114	150 Ω	R176	RT0515214	1.5K Ω
R116	RT0515114	150 Ω	R177	RT0568214	6.8K Ω
R117	RT0522214	2.2K Ω	R178	RT0515314	15K Ω
R118	RT0515214	1.5K Ω	R179	RT0527214	2.7K Ω
R119	RT0510114	100 Ω	R180	RT0515214	1.5K Ω
R120	RT0556214	5.6K Ω			
R121	RT0512314	12K Ω	R181	RT0582314	82K Ω
R122	RT0510214	1K Ω	R182	RT0522114	220 Ω
R123	RT0510114	100 Ω	R183	RT0556214	5.6K Ω
R124	RT0515114	150 Ω	R184	RT0582314	82K Ω
R125	RT0533114	330 Ω	R185	RT0515314	15K Ω
			R186	RT0513314	13K Ω
			R187	RT0522214	2.2K Ω

REF. DESIG.	PART NO.	DESCRIPTION	REF. DESIG.	PART NO.	DESCRIPTION
R188	RT0547214	4.7K Ω	C154	DF1627201	Film, 0.0027 μ F $\pm$ 10%
R189	RT0522214	2.2K Ω	C155	DF1627201	Film, 0.0027 μ F $\pm$ 10%
R190	RT0522314	22K Ω	C156	EA4740501	Electroly, 0.47 μ F, 50V
R191	RT0533214	3.3K Ω	C157	EA4740501	Electroly, 0.47 μ F, 50V
R192	RT0515214	1.5K Ω	C158	DF1647201	Film, 0.0047 μ F $\pm$ 10%
R193	RT0527414	270K Ω	C159	DF1647201	Film, 0.0047 μ F $\pm$ 10%
R194	RT0510414	100K Ω	C160	DF1533205	Film, 0.0033 μ F $\pm$ 5%
CAPACITORS			C161	DF1533205	Film, 0.0033 μ F $\pm$ 5%
C101	CA3240007	Variable, FM-3, AM-2, Gang	C162	DF5582101	Film, 820PF $\pm$ 5%
C102	DD1210001	Ceramic, 10PF $\pm$ 10%	C163	DF5582101	Film, 820PF $\pm$ 5%
C103	DK1710201	Ceramic, 0.001 μ F $\pm$ 20%	C164	DF1618205	Film, 0.0018 μ F $\pm$ 10%
C104	DK1820302	Ceramic, 0.02 μ F +100%, -0%	C165	DF1618205	Film, 0.0018 μ F $\pm$ 10%
C105	EM2240251	Electroly, 0.22 μ F, 25V	C166	DF1615301	Film, 0.015 μ F $\pm$ 10%
C106	DK1820302	Ceramic, 0.02 μ F +100%, -0%	C167	DF1615301	Film, 0.015 μ F $\pm$ 10%
C107	DK1820302	Ceramic, 0.02 μ F +100%, -0%	C168	EA4740501	Electroly, 0.47 μ F, 50V
C108	DK1840302	Ceramic, 0.04 μ F +80%, -20%	C169	EA4740501	Electroly, 0.47 μ F, 50V
C109	DD1210001	Ceramic, 10PF $\pm$ 10%	C170	EA2270169	Electroly, 220 μ F, 16V
C110	DD1105001	Ceramic, 5PF $\pm$ 0.5PF	C171	DF1768201	Film, 0.0068 μ F $\pm$ 20%
C111	DD1530101	Ceramic, 300PF $\pm$ 5%	C172	DF1722301	Film, 0.022 μ F $\pm$ 20%
C112	DD1615003	Ceramic, 15PF $\pm$ 10%	C173	DF1740301	Film, 0.04 μ F $\pm$ 20%
C113	DK1710201	Ceramic, 0.001 μ F $\pm$ 20%	C174	DF6539101	Film, 390PF $\pm$ 5%
C114	DK1840302	Ceramic, 0.04 μ F +80%, -20%	C175	DD1620001	Ceramic, 20PF $\pm$ 10%
C115	DK1820302	Ceramic, 0.02 μ F +100%, -0%	C176	DF1740301	Film, 0.04 μ F $\pm$ 20%
C116	DD1102004	Ceramic, 2PF $\pm$ 0.5PF	C177	EA4760109	Electroly, 47 μ F, 10V
C117	DD1615003	Ceramic, 15PF $\pm$ 10%	C178	DK1840302	Ceramic, 0.04 μ F +80%, -20%
C118	DD1520001	Ceramic, 20PF $\pm$ 5%	C179	DD1530101	Ceramic, 300PF $\pm$ 5%
C119	DD1207003	Ceramic, 7PF $\pm$ 1PF	C180	DD1620101	Ceramic, 200PF $\pm$ 10%
C120	DD1525003	Ceramic, 25PF $\pm$ 5%	C181	DF1647201	Film, 0.0047 μ F $\pm$ 10%
C121	DK1820302	Ceramic, 0.02 μ F +100%, -0%	C182	DF1647201	Film, 0.0047 μ F $\pm$ 10%
C122	DD1650101	Ceramic, 500PF $\pm$ 10%	C183	DK1840302	Ceramic, 0.04 μ F +80%, -20%
C123	DK1840302	Ceramic, 0.04 μ F +80%, -20%	C184	EA4740501	Electroly, 0.47 μ F, 50V
C124	DK1820302	Ceramic, 0.02 μ F +100%, -0%	C185	DK1840302	Ceramic, 0.04 μ F +80%, -20%
C125	EA1060169	Electroly, 10 μ F, 16V	C186	EA1050509	Electroly, 1 μ F, 50V
C126	DK1840302	Ceramic, 0.04 μ F +80%, -20%	C187	CT1100008	Trimming, 10PF, NPO
C127	DK1840302	Ceramic, 0.04 μ F +80%, -20%	C188	DK1710301	Ceramic, 0.01 μ F $\pm$ 20%
C128	DD1620001	Ceramic, 20PF $\pm$ 10%	SEMICONDUCTORS		
C129	EA1060169	Electroly, 10 μ F, 16V	H101	HF200411B	F.E.T., 2SK41 (E)
C130	DD1610101	Ceramic, 10PF $\pm$ 10%	H102	HT306681C	Transistor, 2SC668 (C)
C131	DK1820302	Ceramic, 0.02 μ F +100%, -0%	H103	HT309301C	Transistor, 2SC930 (C)
C132	DK1840302	Ceramic, 0.04 μ F +80%, -20%	H104	HT309301C	Transistor, 2SC930 (C)
C133	DK1820302	Ceramic, 0.02 μ F +100%, -0%	H105	HT309301C	Transistor, 2SC930 (C)
C134	DK1820302	Ceramic, 0.02 μ F +100%, -0%	H106	HT309301C	Transistor, 2SC930 (C)
C135	DK1820302	Ceramic, 0.02 μ F +100%, -0%	H107	HT309301C	Transistor, 2SC930 (C)
C136	DK1840302	Ceramic, 0.04 μ F +80%, -20%	H108	HT309301C	Transistor, 2SC930 (C)
C137	DK1840302	Ceramic, 0.04 μ F +80%, -20%	H109	HT309301C	Transistor, 2SC930 (C)
C138	EA1060169	Electroly, 10 μ F, 16V	H110	HT305361G	Transistor, 2SC536 (G)
C139	DD1650101	Ceramic, 500PF $\pm$ 10%	H111	HT305361E	Transistor, 2SC536 (E)
C140	EA1060169	Electroly, 10 μ F, 16V	H112	HT305361E	Transistor, 2SC536 (E)
C141	DD1620101	Ceramic, 200PF $\pm$ 10%	H113	HT309291C	Transistor, 2SC929 (C)
C142	DD1620101	Ceramic, 200PF $\pm$ 10%	H114	HC1001703	I.C., LA3310
C143	DK1840302	Ceramic, 0.04 μ F +80%, -20%	H115	HD1000303	Diode, 1S188FM2
C144	DD1610101	Ceramic, 100PF $\pm$ 10%	H116	HD1000303	Diode, 1S188FM2
C145	DK1820302	Ceramic, 0.02 μ F +100%, -0%	H117	HD2001105	Diode, 1S1555
C146	EA1050509	Electroly, 1 μ F, 50V	H118	HD2001105	Diode, 1S1555
C147	EA1050509	Electroly, 1 μ F, 50V	H119	HD1000303	Diode, 1S188FM2
C148	DF1722201	Film, 0.0022 μ F $\pm$ 20%	H120	HD1000303	Diode, 1S188FM2
C149	EA3350509	Electroly, 3.3 μ F, 50V	H121	HD1000303	Diode, 1S188FM2
C150	EA1060169	Electroly, 10 μ F, 16V	H122	HD1000303	Diode, 1S188FM2
C151	DF1610201	Film, 0.001 μ F $\pm$ 10%	H123	HD1000303	Diode, 1S188FM2
C152	EA1060169	Electroly, 10 μ F, 16V	H124	HD1000303	Diode, 1S188FM2
C153	EA3360109	Electroly, 33 μ F, 10V	H125	HD1000303	Diode, 1S188FM2
			H126	HD2000121	Diode, 1S2473-C

REF. DESIG.	PART NO.	DESCRIPTION	REF. DESIG.	PART NO.	DESCRIPTION
J101	YP1000113	MISCELLANEOUS Plug	P300	YD2849003 ZZ2849703	P.W. Board P.W. Board Assembly
J103 }	YP1000113	Plug	R301	RT0510214	Resistor, 1K Ω $\pm$ 5%, $\frac{1}{4}$ W
J126			R302	RT0510214	Resistor, 1K Ω $\pm$ 5%, $\frac{1}{4}$ W
0906	282110901	Shield	R303	RT0518314	Resistor, 18K Ω $\pm$ 5%, $\frac{1}{4}$ W
0907	288610904	Shield	R304	RT0518314	Resistor, 18K Ω $\pm$ 5%, $\frac{1}{4}$ W
0908	285010902	Shield	R305	GT0515212	Resistor, 1.5K Ω $\pm$ 5%, $\frac{1}{4}$ W
1110	62031650W	Lug	R306	RT0539214	Resistor, 3.9K Ω $\pm$ 5%, $\frac{1}{4}$ W
P400	YD2849004 ZZ2849004	P.W. Board, Power P.W. Board Assembly	C301	EA4760169	Electroly Cap., 47 μ F, 16V
R401	GJ1025102	RESISTORS 250 Ω $\pm$ 10%, 2W	S301	SP0604003	Push Switch, Band Selector
R402	GJ1025102	250 Ω $\pm$ 10%, 2W	J301	YP1000099	Plug
R403	RT0533314	33K Ω $\pm$ 5%, $\frac{1}{4}$ W	J302	YP1000099	Plug
R404	RT0533314	33K Ω $\pm$ 5%, $\frac{1}{4}$ W	S001	SP0301001	Push Switch
C401	DK1810351	CAPACITORS Ceramic, 0.01 μ F +100%, -0%, 500V	M001	IM1104208	DC Meter, Signal
C402	DK1810351	Ceramic, 0.01 μ F +100%, -0%, 500V	C001	EA1070109	Electroly Cap., 100 μ F, 10V
C403	EA3370509	Electroly, 330 μ F, 50V	0417	285011801	Spacer
C404	EA4770109	Electroly, 470 μ F, 10V	1438	285012003	Insulator
C405	EA3370359	Electroly, 330 μ F, 35V	1439	289105305	Cover
C406	EA1070160	Electroly, 100 μ F, 16V	0501	285016009	Bracket
C407	EA2270169	Electroly, 220 μ F, 16V	0503	263711203	Shaft
C408	DK1840301	Ceramic, 0.04 μ F +100%, -0%	0505	257726201	Pulley
H401	HT311751E	SEMICONDUCTORS Transistor, 2SC1175 (E)	0502	285016008	Bracket
H402	HD2001003	Diode, DS130 (YD)	1436	263711203	Shaft
H403	HD2001003	Diode, DS130 (YD)	1437	257726201	Pulley
H404	HD2001003	Diode, DS130 (YD)	0414	281827101	Holder
H405	HD3002109	Diode, BZ140	0631	51570306B	P.H. Tapt Screw x 4
J401 }	YP1000099	MISCELLANEOUS Plug	J005	YJ0800013	Socket
J409			J006	YJ0800013	Socket
0403	282716050	Bracket K	J007	YJ0800013	Socket
0408	285020101	Partitioner	J008	YJ0800013	Socket
0409	285016003	Bracket	M002	IN1008007	Lamp
0410	285016004	Bracket	M003	IN1008007	Lamp
0412	285012201	Sticker	M004	IN1008007	Lamp
0421	257710602	Bearing	M005	IN1008007	Lamp
0422	141511801	Spacer	1537	289110106	Support
0507	285016051	Bracket K	1538	51570315B	P.H. Tapt Screw
0611	51040306A	F.H.M. Screw x 2	R003	RC1002012	Resistor, 2 Ω $\pm$ 10%, $\frac{1}{4}$ W
0615	51100306A	B.H.M. Screw x 4	0415	282716003	Bracket
0618	51100306A	B.H.M. Screw x 4	0518	282710701	Sheet
0621	51100306A	B.H.M. Screw x 6	1536	51570306B	P.H. Tapt Screw x 2
0623	51100306A	B.H.M. Screw x 2	P200	YD2849002 ZZ2849002	P.W. Board P.W. Board Assembly
0625	51100306A	B.H.M. Screw x 3	M201	IN1006301	Lamp, 6.3V, 40mA
0626	51100306A	B.H.M. Screw	M202	IN1006301	Lamp, 6.3V, 40mA
			M203	IN1006301	Lamp, 6.3V, 40mA
			J201 }	YP1000099	Plug
			J205		

REF. DESIG.	PART NO.	DESCRIPTION	REF. DESIG.	PART NO.	DESCRIPTION
R002	RC1018012	Resistor, 18Ω ± 10%, ½W	1033	138200503	Clamper x 4
0413	282727401	Reflector	1103	51570408B	P.H. Tapt Screw x 2
0619	51570306B	P.H. Tapt Screw x 2	1104	54040402N	Spring Washer x 2
0630	51570305B	P.H. Tapt Screw x 4	1108	51570306B	P.H. Tapt Screw x 6
0418	282705101	Guide	1113	51570306B	P.H. Tapt Screw x 3
0718	145525903	Bush x 2	1122	51570306B	P.H. Tapt Screw x 8
0814	51100306S	B.H.M. Screw x 3	1124	51100306S	B.H.M. Screw x 6
0819	54050400R	T.L. Washer OR	1126	51570306B	P.H. Tapt Screw x 7
0826	51100308S	B.H.M. Screw x 2	1127	54050300R	T.L. Washer OR x 2
0827	53110303E	Hexagon Nut x 2	1131	51570306B	P.H. Tapt Screw
0832	51100308S	B.H.M. Screw x 4	1132	54050300R	T.L. Washer OR
0833	53110303E	Hexagon Nut x 4	1135	54050300R	T.L. Washer OR
J001	YJ0800012	Socket, Fuse Holder	1117	53110303E	Hexagon Nut
J003	YT0104004	Terminal, Ant.	2836	51570306B	P.H. Tapt Screw
J004	YT0202007	Terminal, Output	2837	54050300R	T.L. Washer OR
J010	YT0101003	Terminal, Ground	0112	281815401	Knob x 5
W001	YC0240010	AC Cord	0118	284925701	Lid, For U.S.A.
G001	BF1040001	Printed Compo., 0.1μF + 120Ω	0119	257711803	Spacer x 3, For U.S.A.
F001	FS1010008	Fuse, 1A (UL)	0120	282825702	Lid
J011	YL0102003	Terminal	0202	284926501	Indicator, For U.S.A.
J012	YT0201006	Terminal, Quadrail	0203	284926502	Indicator, For CANADA
L003	LC1154004	Choke Coil, 150μH	0207	284926506	Indicator
L001	LF1120024	Ant. Coil	0211	257886101	Label, UL Caution
0710	257816052	Bracket K	0212	257886102	Label, Do Not Remove Cover, For U.S.A.
0714	281927103	Holder	0213	257886103	Label, See Marking on Bottom, For U.S.A.
0806	51100308S	B.H.M. Screw x 2	0214	250626506	Indicator, Do Not Use as Handle
0807	54050300R	T.L. Washer OR x 2	0219	951091101	Label, LL NO, For CANADA
0808	53110303E	Hexagon Nut x 2	0220	282186102	Label, Caution, For CANADA
0810	51100310S	B.H.M. Screw x 2	0224	951110103	Label, UL, For U.S.A.
0811	53110303E	Hexagon Nut x 2	0225	245786104	Label, CSA, For CANADA
R001	GT0522512	Resistor, 2.2MΩ ± 5%, ½W	3037	951091102	Label, For U.S.A.
1133	62031650W	Lug	0302	51122608E	T.H.M. Screw x 4
0903	282715901	Drum	0304	51100406S	B.H.M. Screw x 8
0904	71101569M	Spring	0306	51480406S	B.H.M. Screw F x 4, For U.S.A.
0915	51064019A	Screw x 2	0432	285011202	Shaft
2236	138200503	Clamper x 3	0433	284912001	Insulator
W002	YW2849001	Wire Material	3038	288686101	Label
W003	YX2849001	Wire Material	0532	282626901	Protector
PZ01	YD2891007	P.W. Board	0604	54040402N	Spring Washer
	ZZ2891007	P.W. Board Assembly	0634	51100304S	B.H.M. Screw x 2
MZ01	IN1006302	Lamp	0635	56382540G	Eyelet
MZ02	IN1006302	Lamp	0613	51100306A	B.H.M. Screw x 2
JZ01	YP1000113	Plug	0614	54050300R	T.L. Washer OR x 2
JZ02	YP1000113	Plug	0824	51100306S	B.H.M. Screw x 2
0521	284930201	Dial	3137	288506450	Case K, For CANADA
0523	282705302	Cover	3141	52010420A	H. Head Bolt x 4, For CANADA
0423	281810650	Bearing K	3142	54080400R	T.L. Washer RR x 4
0603	51640412D	Set Screw C.P.	1202	284985101	Instructions
2737	54040402N	Spring Washer	1209	284985601	Schematic Diagram
0605	53110403E	Hexagon Nut	3236	288785108	Instructions
0121	275905701	Leg x 4, For U.S.A.	1217	288585107	Instructions
0310	51490410S	B.H.M. Screw F.S. x 4, For U.S.A.	1219	281885104	Instructions
1026	285010502	Chassis	1221	257785450	Guarantee Card K
			1302	284980105	Packing Case, For U.S.A.
			1303	284980106	Packing Case, For U.S.A.
			1305	284980102	Packing Case, For CANADA
			1306	284980112	Packing Case, For CANADA
			1308	289180301	Partitioner x 2, For U.S.A.
			1309	288280303	Partitioner x 2, For CANADA
			1312	901383033	Polyethylen Bag, For U.S.A.
			1313	901433533	Polyethylen Bag, For CANADA

REF. DESIG.	PART NO.	DESCRIPTION
1314	901302501	Polyethylen Bag x 2
1317	102980401	Sleeve
1319	273182101	Silicagel x 2
1320	281905601	Buffer
1323	952281501	Serial No Card x 4, For U.S.A.
1324	952301512	Serial No Card x 4, For CANADA
1332	ZA0200007	Ext. Antenna
1333	ZD0200010	Connective Cord
1334	ZD0120006	Connective Cord

TECHNICAL SPECIFICATIONS

FM SECTION

Tuning Frequency Range	88 — 108MHz
IHFM Usable Sensitivity	3.0 μ V
IHFM Selectivity	48dB
Capture Ratio	3dB
Image Rejection Ratio at 106MHz	50dB
Signal to Noise Ratio (Mono)	65dB
Signal to Noise Ratio (Stereo)	55dB
Total Harmonic Distortion (Mono)	0.5%
Total Harmonic Distortion (Stereo)	0.8%
Frequency Response (ref. 75 μ sec. de-emphasis)	$\pm$ 2dB, 30Hz-15KHz
Stereo Separation at 1KHz	40dB

AM SECTION

Tuning Frequency Range	540-1605KHz
Usable Sensitivity	25 μ V
Selectivity	20dB
Image Rejection Ratio at 1400KHz	40dB
Signal to Noise Ratio	45dB
Frequency Response, —3dB down	50Hz-3.3KHz
Total Harmonic Distortion	1%

GENERAL

Power Requirements	120V AC 50 to 60Hz
Power Consumption	15 Watts
Dimensions — Panel Width	14-11/64"—360 mm
— Panel Height	4-23/32"—120 mm
— Depth	11-1/32"—280 mm
Weight — Unit along	12.1lbs—5.5Kg
— Packed for Shipment	17.6lbs—8Kg

* These specifications and exterior designs may be changed for improvement without advance notice.



marantz.

MARANTZ CO., INC. • P.O. BOX 99 • SUN VALLEY, CALIFORNIA • 91352



A WHOLLY-OWNED SUBSIDIARY OF SUPERSCOPE INC., SUN VALLEY, CALIFORNIA 91352