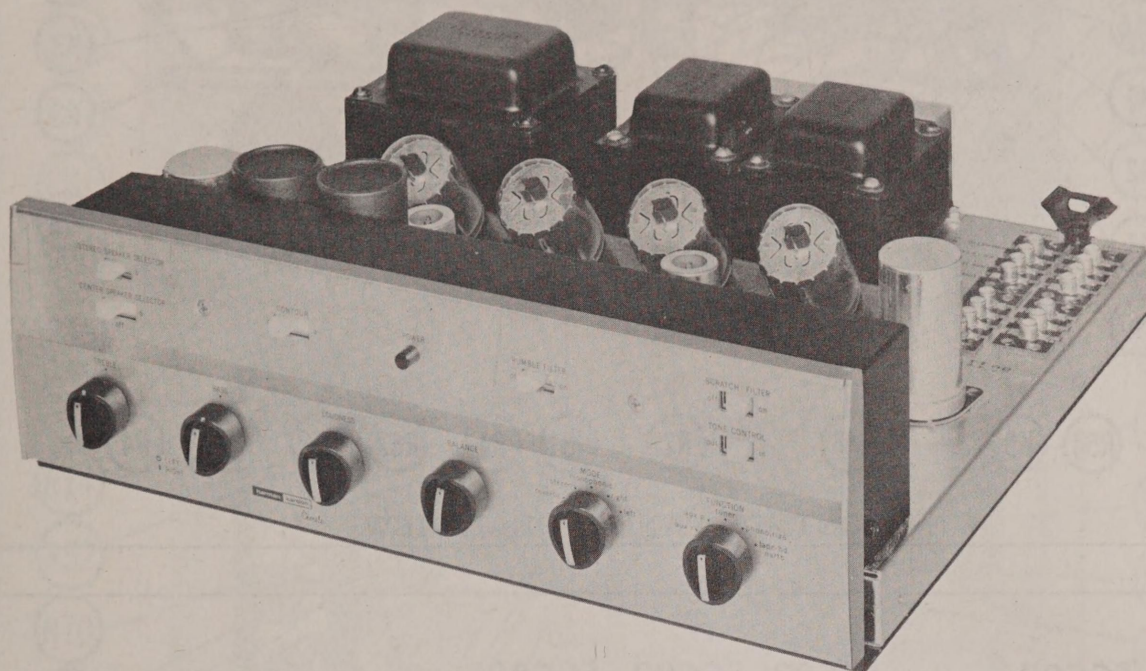


HARMAN-KARDON
MODEL A-260HARMAN-KARDON
MODEL A-260

TRADE NAME	Harman-Kardon Model A-260 (The Chorale)		
MANUFACTURER	Harman-Kardon, Inc., 520 Main Street, Westbury, L. I., N. Y.		
TYPE SET	AC Operated 10 Tube Multi-Input Stereo Amplifier		
POWER SUPPLY	105 - 125 Volts AC, 60 Cycles	RATING	200 Watts, 2.1 Amp. @ 117 Volts AC

ADJUSTMENTS

OUTPUT TUBE BALANCE ADJUSTMENT


1. Set Volume control to MINIMUM.
2. Turn off all equipment connected to the amplifier.
3. Slowly adjust Balance control (located between Output tubes) for MINIMUM hum.
4. If no hum can be heard, set control to mid-position.
5. For best performance, adjustment should be made using an Intermodulation Distortion Analyzer.

HOWARD W. SAMS & CO., INC. Indianapolis 6, Indiana


The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty by Howard W. Sams & Co., Inc., as to the quality and suitability of such replacement part. The numbers of these parts have been compiled from information furnished to Howard W. Sams & Co., Inc., by the manufacturers of KV042




the particular type of replacement part listed. Reproduction or use, without express permission, of editorial or pictorial content, in any manner, is prohibited. No patent liability is assumed with respect to the use of the information contained herein. © 1960 Howard W. Sams & Co., Inc., Indianapolis 6, Indiana. Printed in U.S. of America

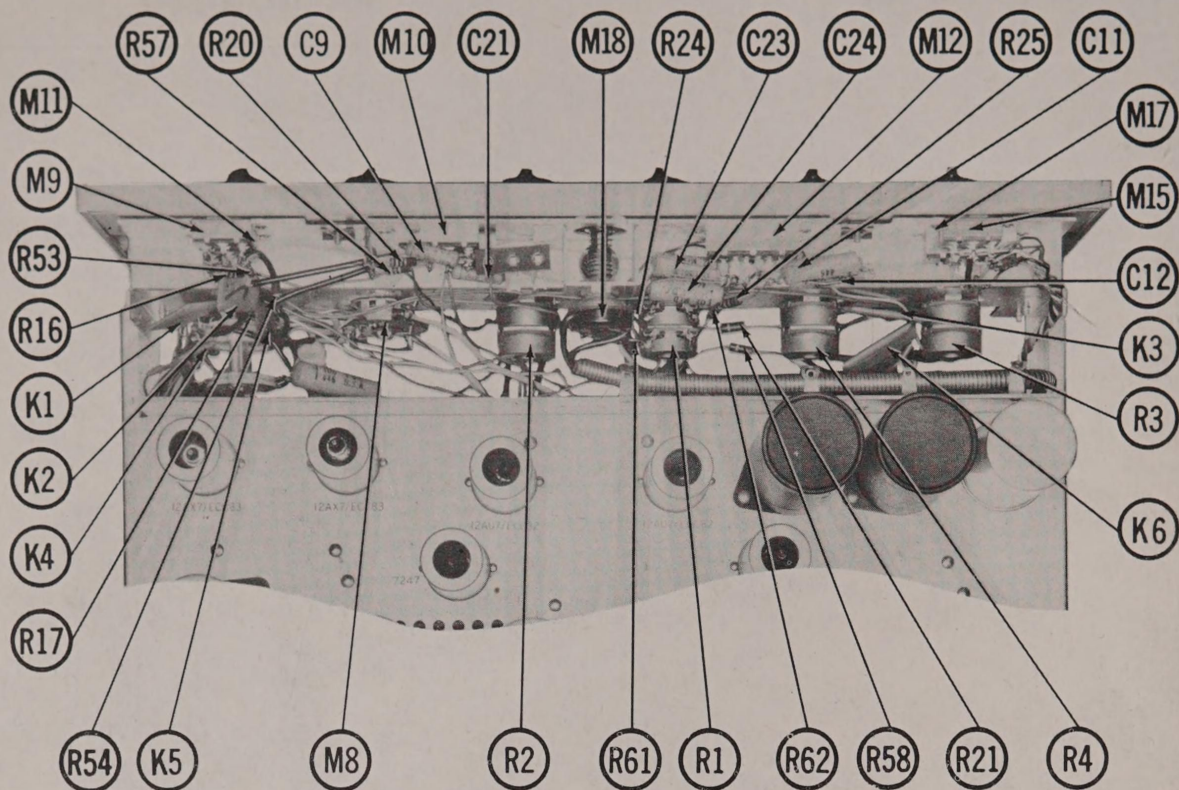


CONTROL PANEL--REAR VIEW

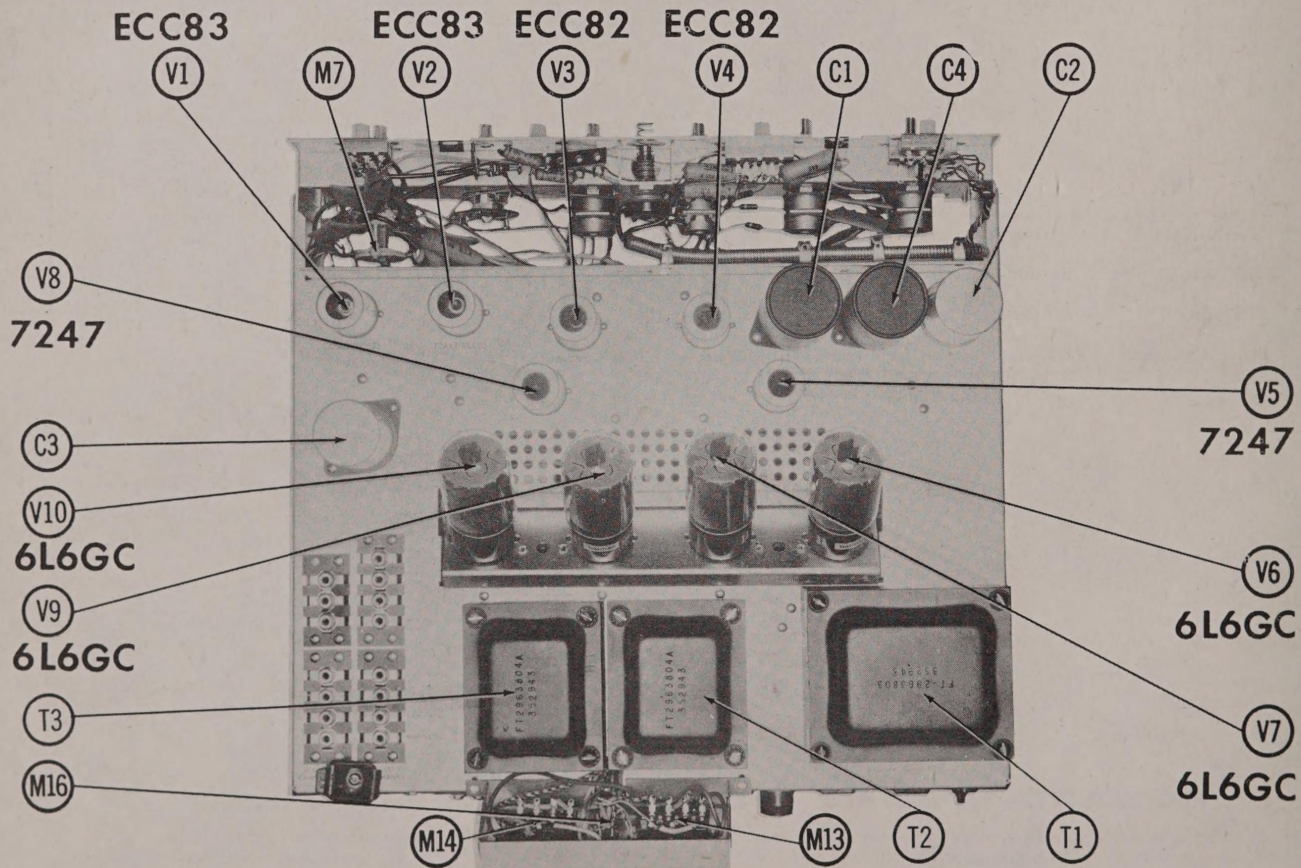

CHASSIS--TOP VIEW

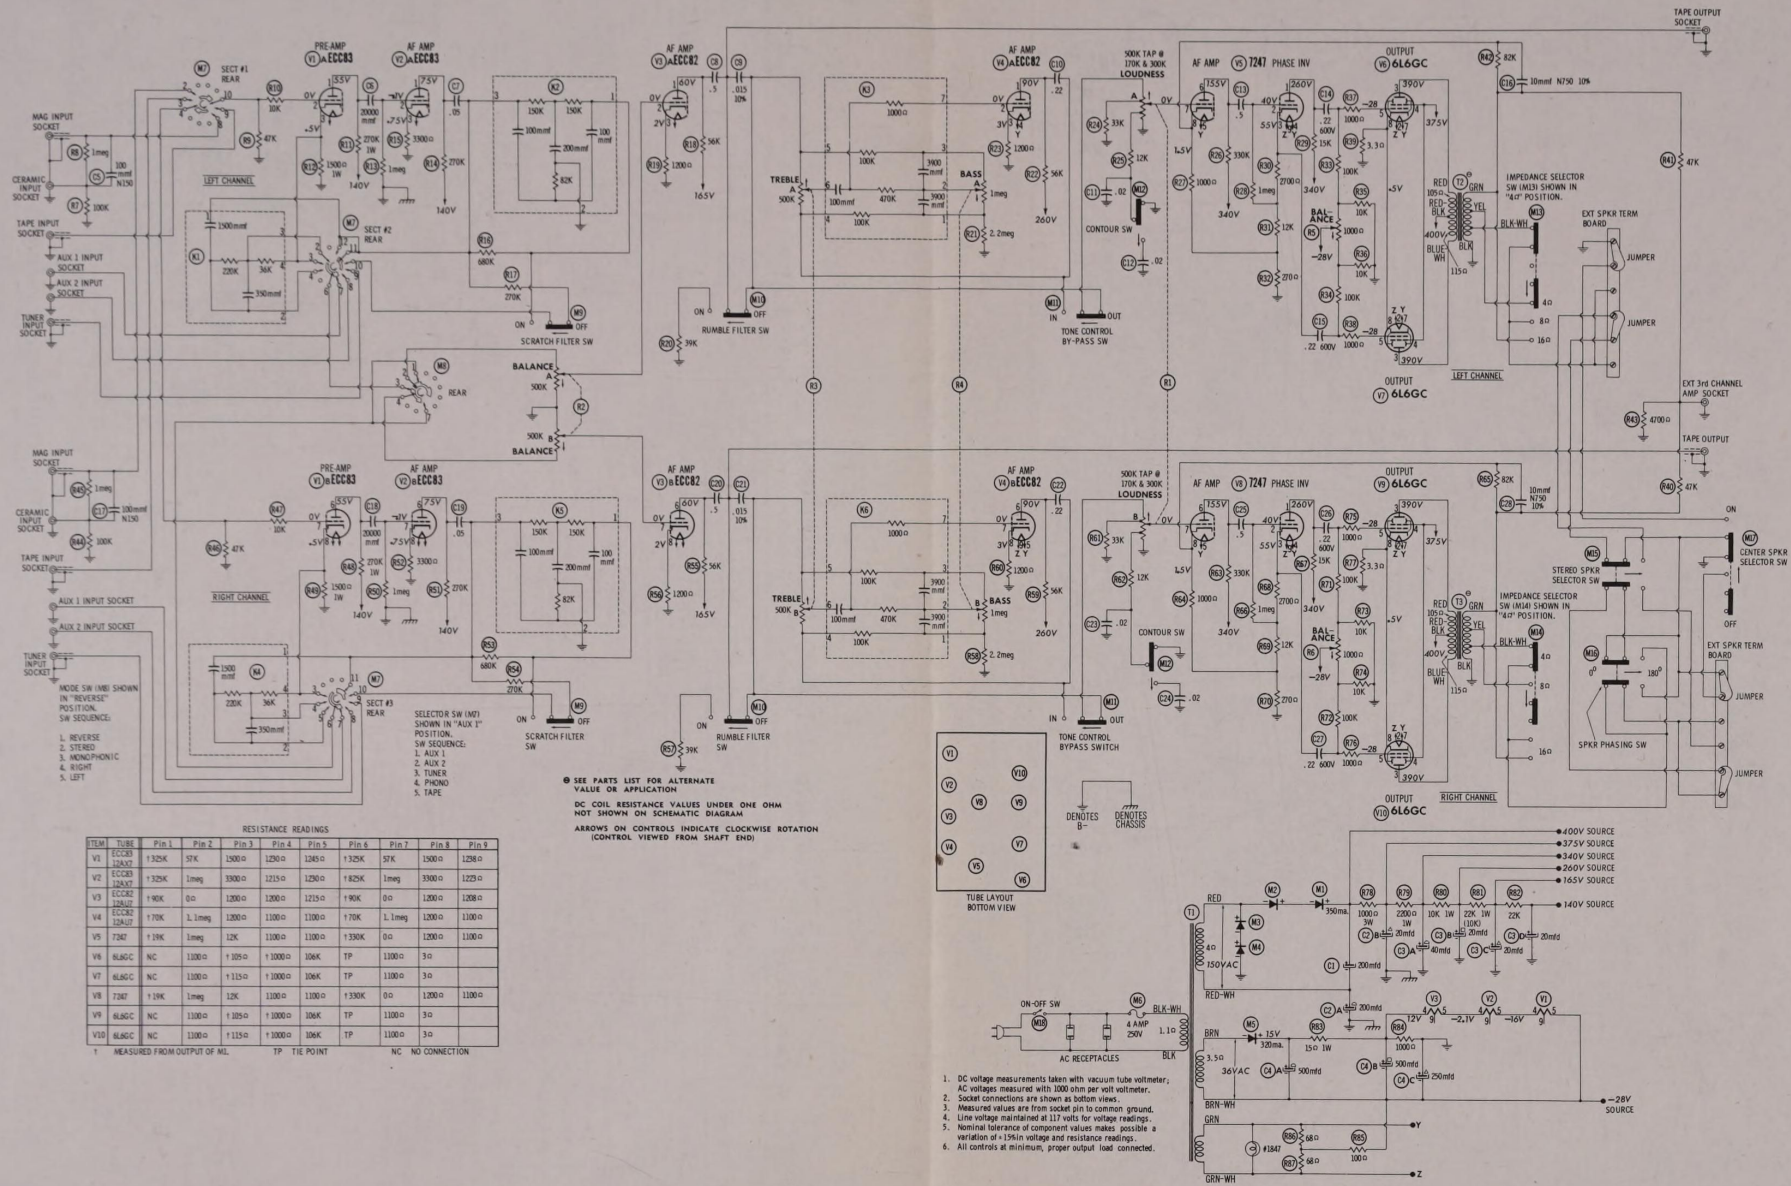

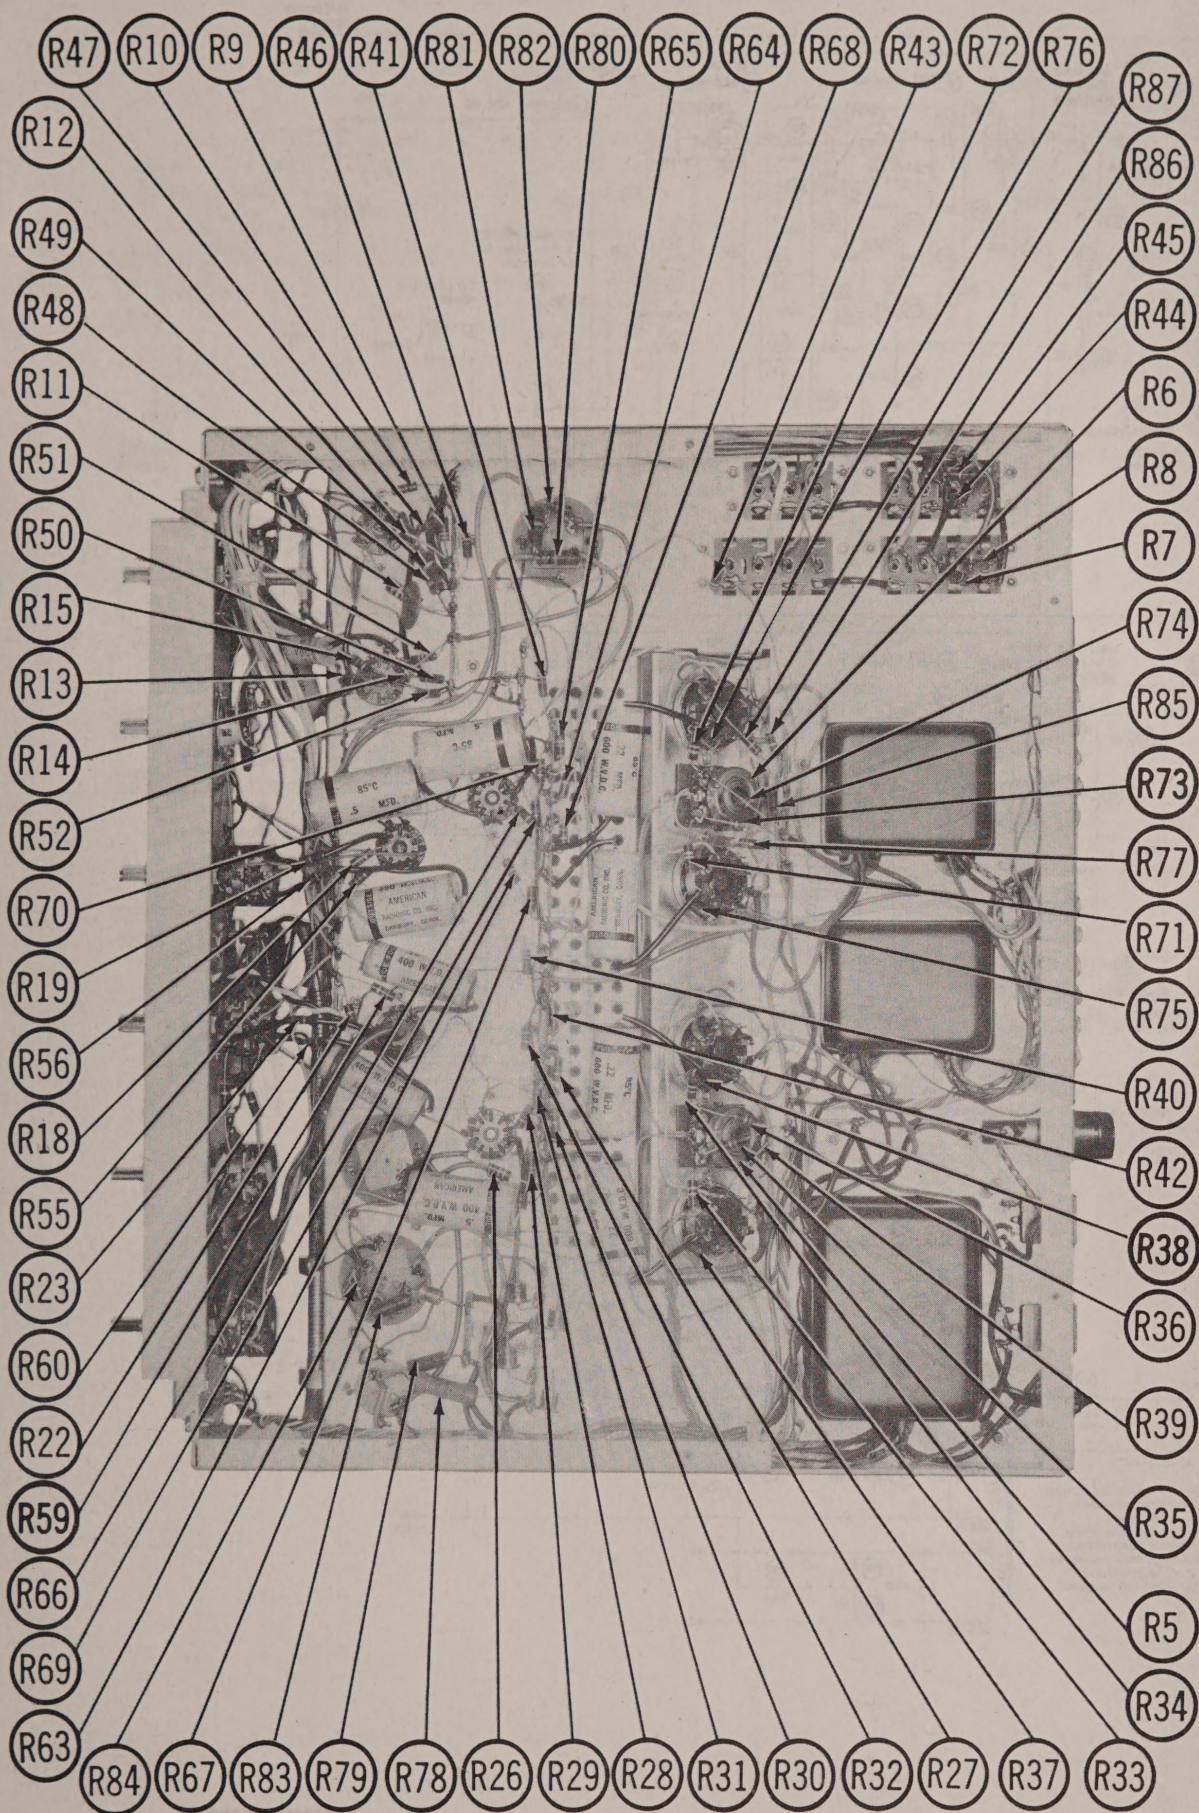

CHASSIS BOTTOM VIEW-RESISTOR IDENTIFICATION

PARTS LIST AND DESCRIPTIONS

WIRING DATA

General-use Unshielded Hook-up Wire	Use BELDEN No. 8530 (Solid) Available in Ten Colors
Power Cord	Use BELDEN No. 1765-B (6 Ft. Length) 1725-K (7½ Ft. Length)

TUBES

• GENERAL ELECTRIC • RAYTHEON • SYLVANIA •					
ITEM No.	USE	TYPE	ITEM No.	USE	TYPE
V1	Left Channel Preamp. - Right Channel Preamp.	ECC83/12AX7	V5	Left Channel AF Amp. - Phase Inverter	7247
V2	Left Channel AF Amp. - Right Channel AF Amp.	ECC83/12AX7	V6	Left Channel Output	6L6GC
V3	Left Channel AF Amp. - Right Channel AF Amp.	ECC82/12AU7	V7	Left Channel Output	6L6GC
V4	Left Channel AF Amp. - Right Channel AF Amp.	ECC82/12AU7	V8	Right Channel AF Amp. - Phase Inverter	7247
			V9	Right Channel Output	6L6GC
			V10	Right Channel Output	6L6GC

ELECTROLYTIC CAPACITORS

REPLACEMENT DATA			
ITEM No.	RATING	CORNEILL-DUBILIER PART No.	NOTES
C1	200	XA0318	
C2A	200	AFH1-31-75	
C2B	200	AFH1-31-75	
C3A	400	AFH1-31-75	
C3B	400	AFH1-31-75	
C4A	50	AFH1-31-75	
C4B	50	AFH1-31-75	
C4C	50	AFH1-31-75	
C4D	50	AFH1-31-75	
C4E	50	AFH1-31-75	
C4F	50	AFH1-31-75	
C4G	50	AFH1-31-75	
C4H	50	AFH1-31-75	
C4I	50	AFH1-31-75	
C4J	50	AFH1-31-75	
C4K	50	AFH1-31-75	
C4L	50	AFH1-31-75	
C4M	50	AFH1-31-75	
C4N	50	AFH1-31-75	
C4O	50	AFH1-31-75	
C4P	50	AFH1-31-75	
C4Q	50	AFH1-31-75	
C4R	50	AFH1-31-75	
C4S	50	AFH1-31-75	
C4T	50	AFH1-31-75	
C4U	50	AFH1-31-75	
C4V	50	AFH1-31-75	
C4W	50	AFH1-31-75	
C4X	50	AFH1-31-75	
C4Y	50	AFH1-31-75	
C4Z	50	AFH1-31-75	

FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

REPLACEMENT DATA			
ITEM No.	RATING	CORNEILL-DUBILIER PART No.	NOTES
C5	100 N150	DD-203	
C6	20000	DD-503	
C7	.05 400V	DD-503	
C8	.5 400V	DD-503	
C9	.015 100V	DD-503	
C10	.02 400V	DD-503	
C11	.02 100V	DD-503	
C12	.02 100V	DD-503	
C13	.5 400V	DD-503	
C14	.22 600V	DD-503	
C15	.22 600V	DD-503	
C16	10 N750 10%	DD-503	
C17	10 N150	DD-503	
C18	20000	DD-503	
C19	.05 400V	DD-503	
C20	.5 400V	DD-503	
C21	.015 100V	DD-503	
C22	.02 400V	DD-503	
C23	.02 100V	DD-503	
C24	.02 100V	DD-503	
C25	.5 400V	DD-503	
C26	.22 600V	DD-503	
C27	.22 600V	DD-503	
C28	10 N750 10%	DD-503	

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

CONTROLS

REPLACEMENT DATA			
ITEM No.	RATING	CORNEILL-DUBILIER PART No.	NOTES
R1A	500K *	RV2963560	
R1B	500K *	RV2963560	
R2A	500K *	RV2963559	
R2B	500K *	RV2963559	
R3A	500K *	RV2963552	
R3B	500K *	RV2963552	
R4A	500K *	RV2963551	
R4B	500K *	RV2963551	
R5A	500K *	RV2963551	
R5B	500K *	RV2963551	
R6A	500K *	RV2963551	
R6B	500K *	RV2963551	
R6C	500K *	RV2963551	
R6D	500K *	RV2963551	
R6E	500K *	RV2963551	
R6F	500K *	RV2963551	
R6G	500K *	RV2963551	
R6H	500K *	RV2963551	
R6I	500K *	RV2963551	
R6J	500K *	RV2963551	
R6K	500K *	RV2963551	
R6L	500K *	RV2963551	
R6M	500K *	RV2963551	
R6N	500K *	RV2963551	
R6O	500K *	RV2963551	
R6P	500K *	RV2963551	
R6Q	500K *	RV2963551	
R6R	500K *	RV2963551	
R6S	500K *	RV2963551	
R6T	500K *	RV2963551	
R6U	500K *	RV2963551	
R6V	500K *	RV2963551	
R6W	500K *	RV2963551	
R6X	500K *	RV2963551	
R6Y	500K *	RV2963551	
R6Z	500K *	RV2963551	

* Taps @ 170K & 300K.

RESISTORS (IRC or EQUIVALENT)

All wattages 1/2 watt, or less, unless otherwise listed.

REPLACEMENT DATA			
ITEM No.	RATING	CORNEILL-DUBILIER PART No.	NOTES
R7	100K	RV2963560	
R8	100K	RV2963560	
R9	100K	RV2963560	
R10	100K	RV2963560	
R11	100K	RV2963560	
R12	100K	RV2963560	
R13	100K	RV2963560	
R14	100K	RV2963560	
R15	100K	RV2963560	
R16	100K	RV2963560	
R17	100K	RV2963560	
R18	100K	RV2963560	
R19	100K	RV2963560	
R20	100K	RV2963560	
R21	100K	RV2963560	
R22	100K	RV2963560	
R23	100K	RV2963560	
R24	100K	RV2963560	
R25	100K	RV2963560	
R26	100K	RV2963560	
R27	100K	RV2963560	
R28	100K	RV2963560	
R29	100K	RV2963560	
R30	100K	RV2963560	
R31	100K	RV2963560	
R32	100K	RV2963560	
R33	100K	RV2963560	

* Alternate Value.

COMPONENT COMBINATIONS

REPLACEMENT DATA			
ITEM No.	RATING	CORNEILL-DUBILIER PART No.	NOTES
K1	Equal. Comp.	RV2963560	
K2	Scratch Filter Comp.	RV2963560	
K3	Tone Comp.	RV2963560	
K4	Equal. Comp.	RV2963560	
K5	Scratch Filter Comp.	RV2963560	
K6	Tone Comp.	RV2963560	

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

CHASSIS—BOTTOM VIEW

C25

10

A diagram showing four nodes labeled M3, M1, M2, and M4 arranged vertically. Each node is a circle containing its label. Lines connect each node to a common vertical line on the left side of the diagram.

