


200—600 m
850—2000 m

2157

103—253 V



45 W.

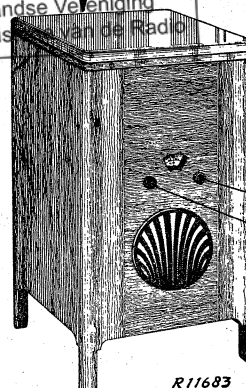


R11683

200—600 m	200—600 m	850—2000 m
VOL. max. 225 m—200 pF— C10, C11 225 m. C13 max.	VOL. max. 225 m—200 pF— C10, C11 225 m. 225 m	VOL. max. 1000 m—200 pF— C10, C11 1000 m. C15 max.

R1	47000 Ω	48 427 10/47K	C1	3 μF	
R2	0,1 MΩ	48 427 10/100K	C2	2,5 μF	
R3	8200 Ω	48 426 10/8K2	C5	1 μF	25 114 06.0
R4	13000 Ω	48 427 10/1K8	C7	0,5 μF	
R6	820 Ω	25 718 90.0	C9	0,5 μF	
R7	47 Ω	48 426 10/47E	C21	0,1 μF	
R8	0,1 MΩ	48 425 10/100K	C3	0,5 μF	
R9	0,22 MΩ	48 425 10/220K	C4	0,5 μF	25 114 07.0
R10	680 Ω	48 427 10/680E	C8	0,5 μF	
R11	1 MΩ	48 425 10/1M	C10	430 pF	25 828 27.0*
R13	0,22 MΩ	48 425 10/220K	C11	430 pF	
R14	50000 Ω	49 500 20 0	C12	20 pF	49 005 05.2
R15	56000 Ω	48 425 10/56K	C13	30 pF	28 212 36.4
			C14	30 pF	28 212 36.4
			C15	30 pF	28 212 36.4
			C16	20 pF	48 429 10/20E
			C17	640 pF	48 429 10/640E
			C18	800 pF	48 429 10/800E
			C20	8200 pF	48 751 10/8K2
			C21	8200 pF	48 751 10/8K2
			C22	20 pF	48 429 10/20E
			C23	3300 pF	48 751 10/3K3
			C24	125 pF	48 429 10/125E
			C26	100 pF	48 429 10/100E

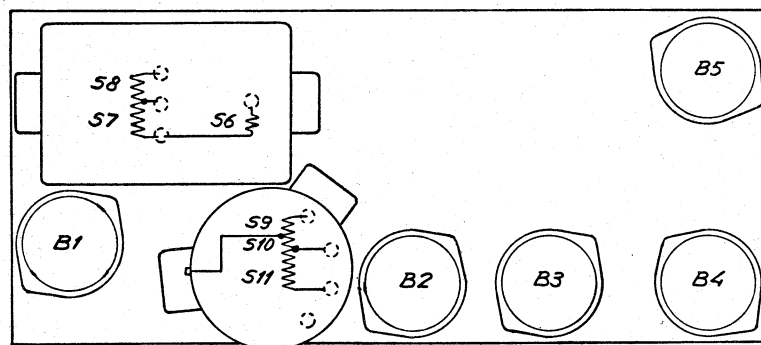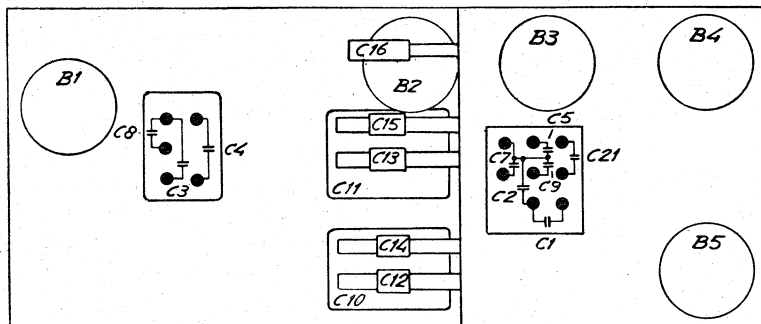

R11401




R11389

A	2950
B	2980


	B1	B2	B3	B4	B5	
	E 462	E 462	E 428	C 453	1823	
Va	160	155	75	150	—	V
Vg2	100	85	—	170	—	V
Ia	3	2	5	15,5	—	mA

VC2 = 170 V.

Copyright
N.V. Philips Gloeilampenfabrieken,
Eindhoven
Imprimé en Hollande

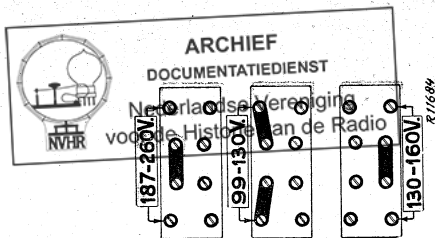

187-260V	99-130V	130-160V
☐	☐	☐
☐	☐	☐
☐	☐	☐
☐	☐	☐
☐	☐	☐
☐	☐	☐
☐	☐	☐
☐	☐	☐
☐	☐	☐

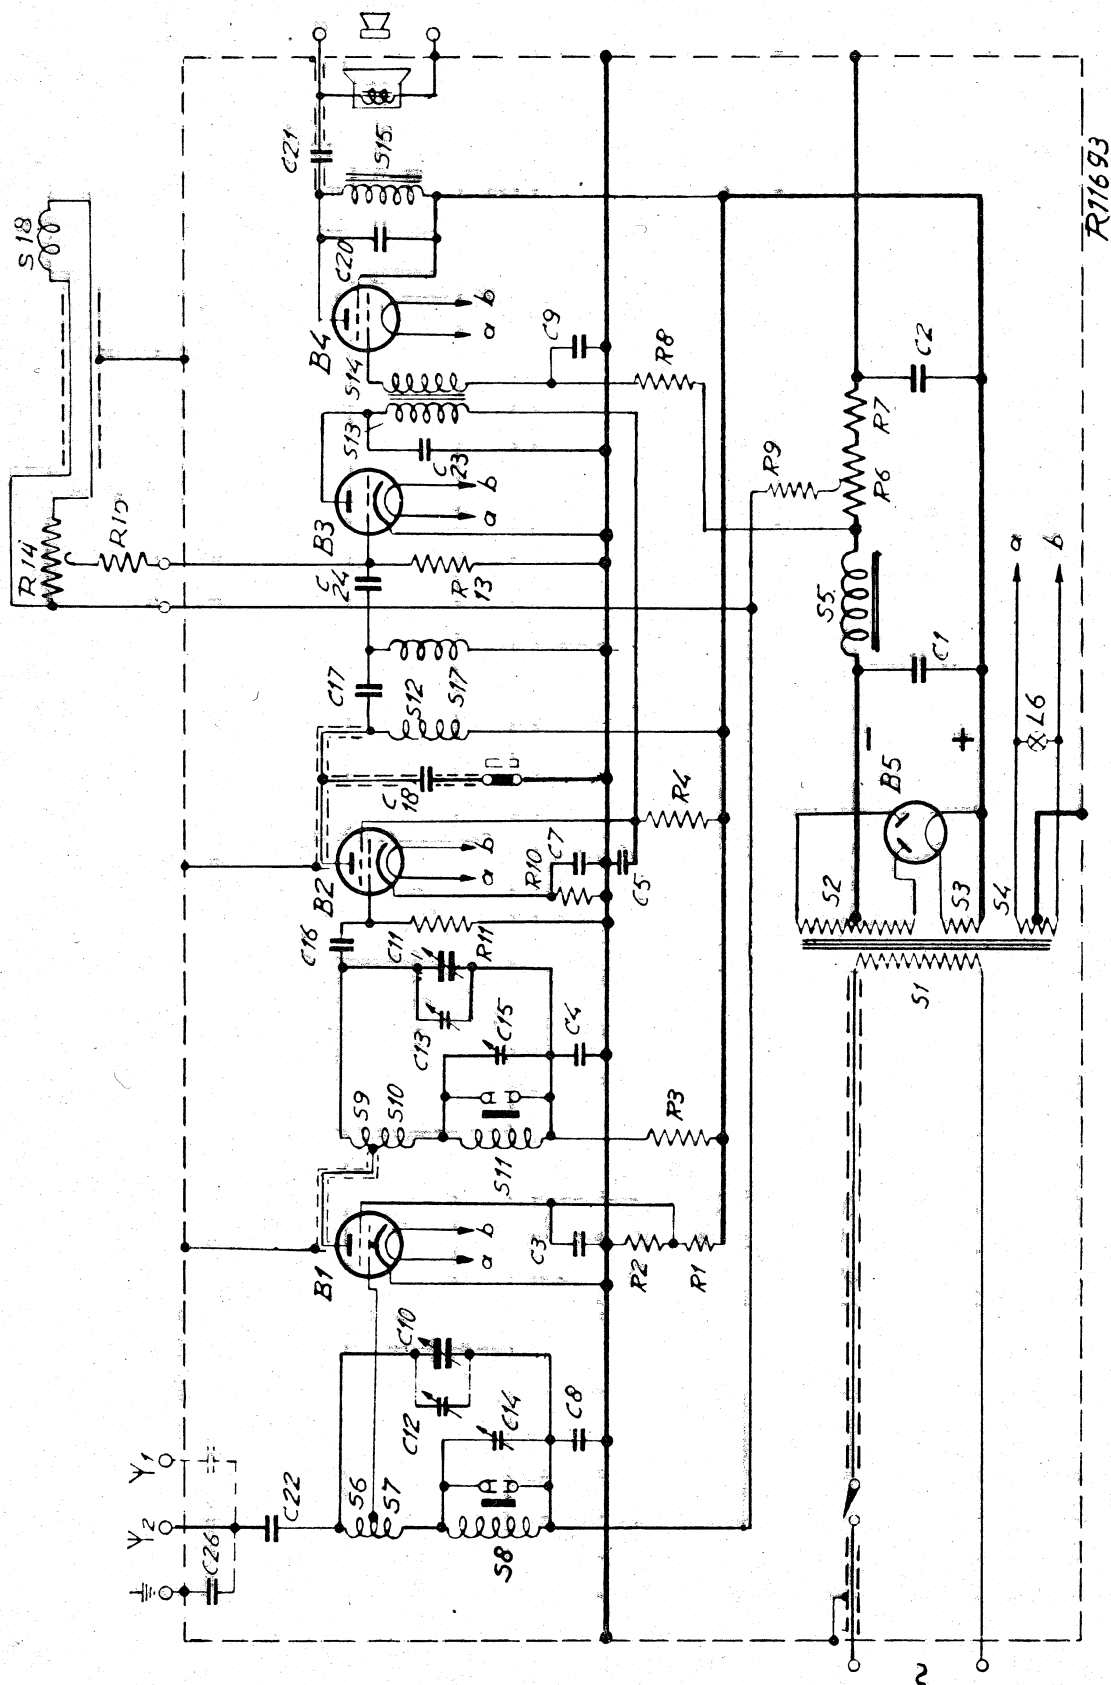

B1 B2	28		E462
B3	23		E428
B4	24		C453
B5	4		I833