For "GN" type (220-V model)

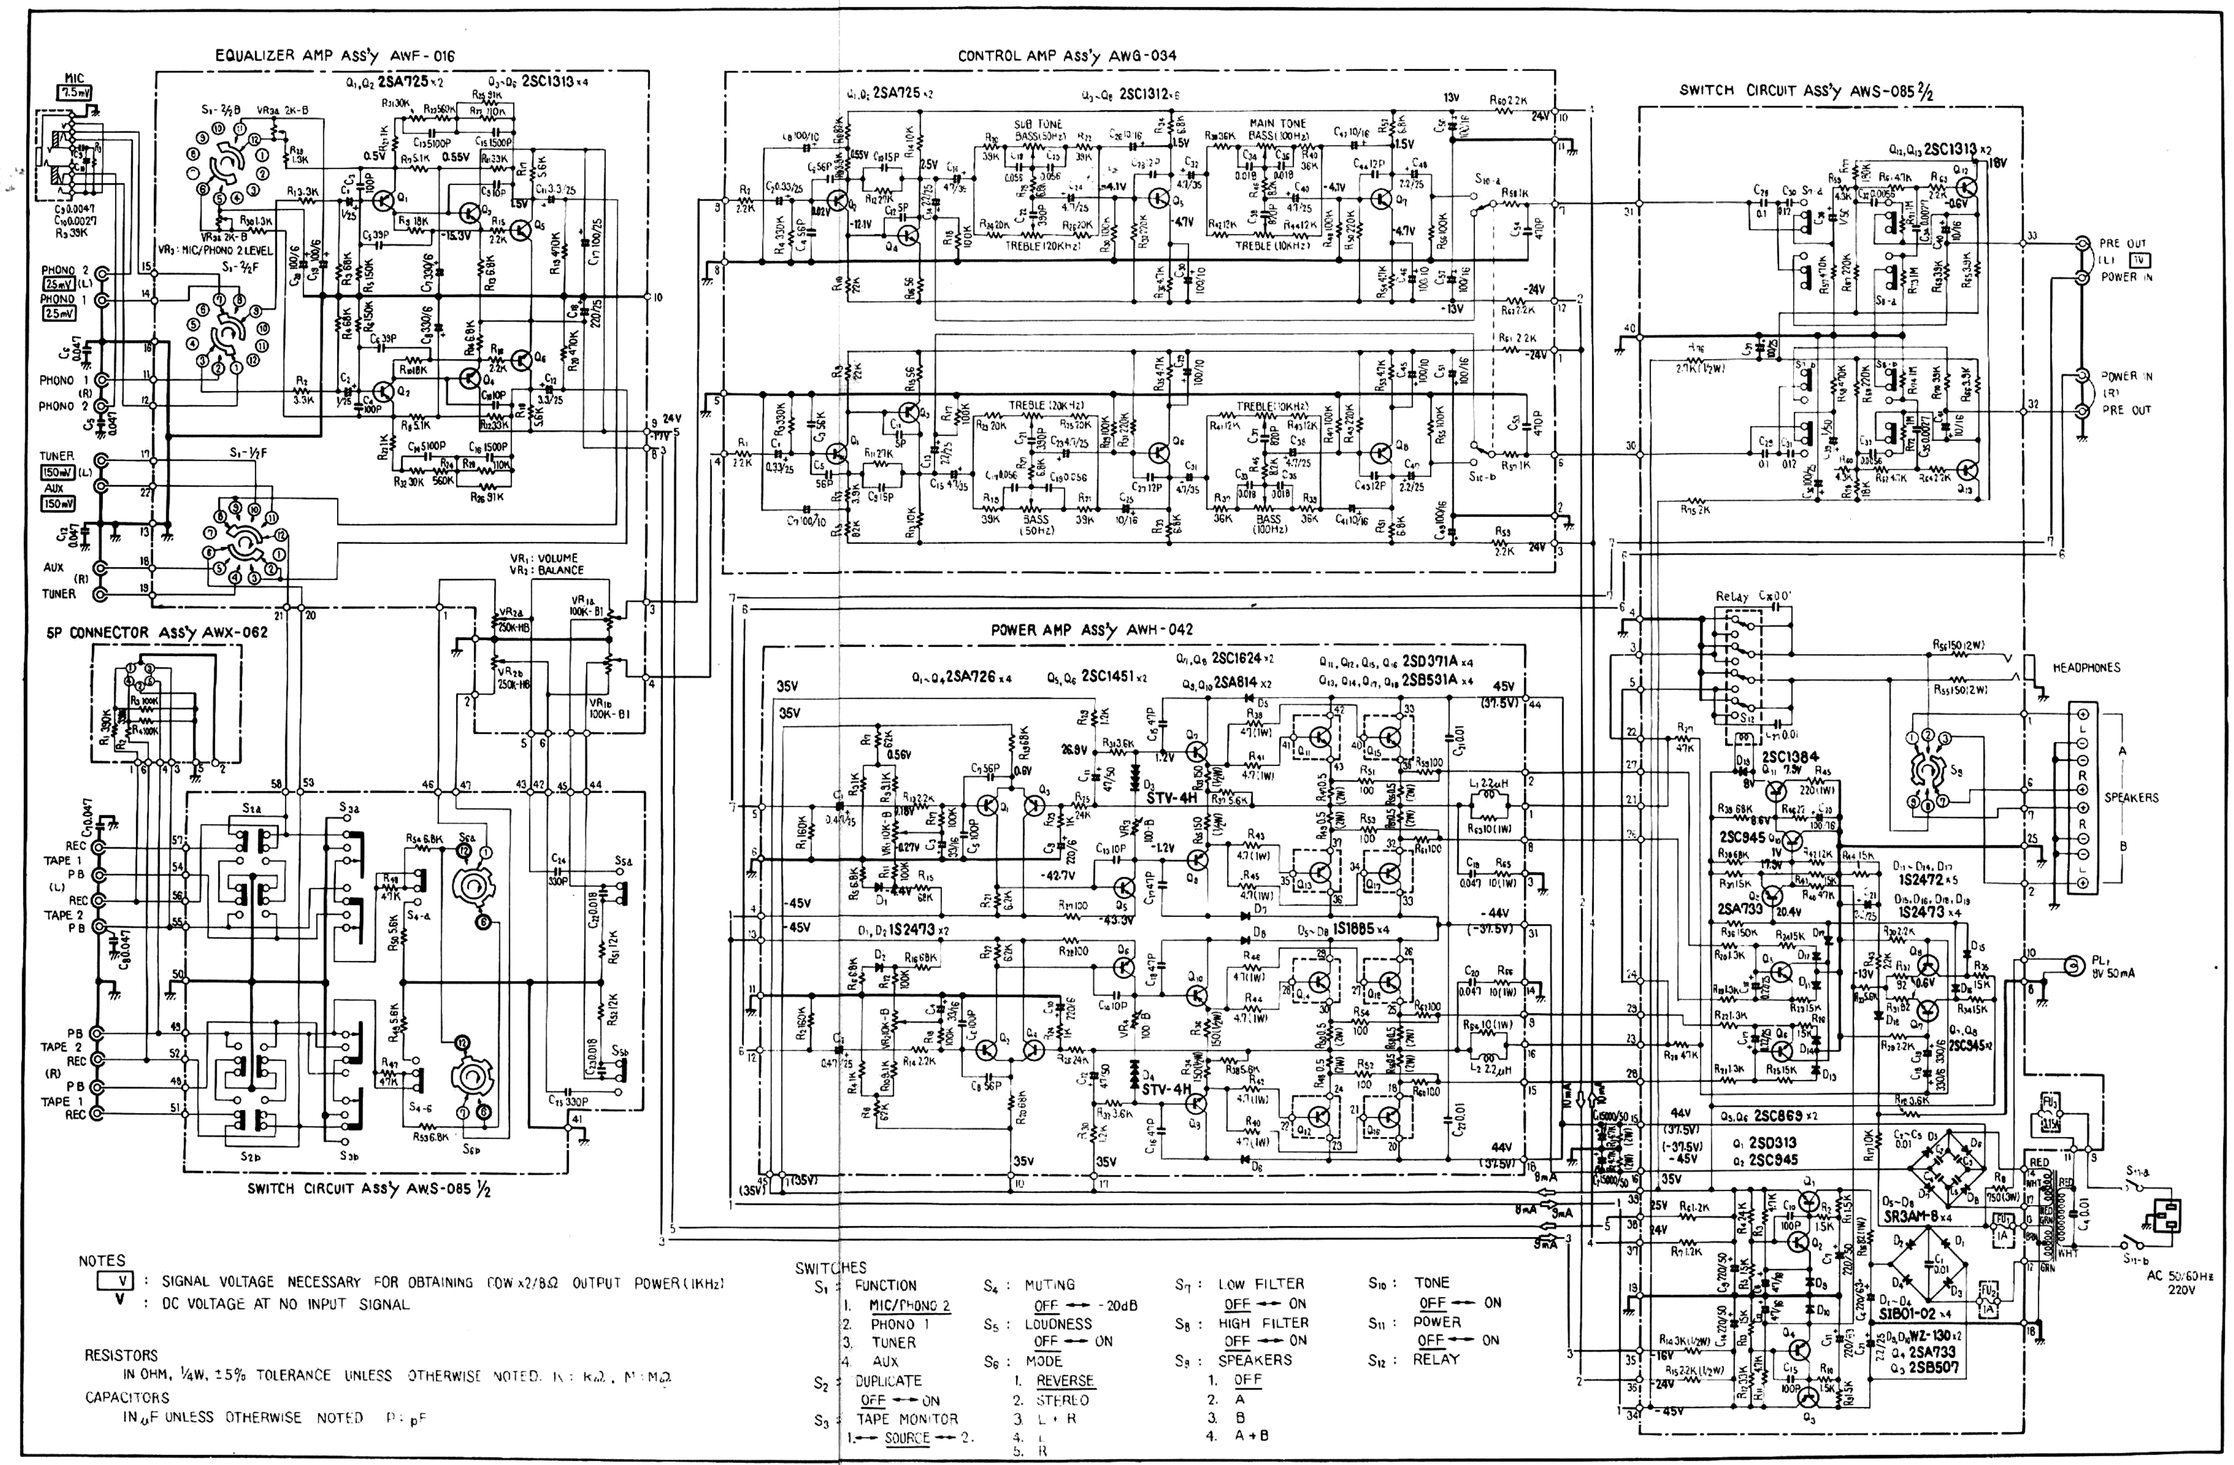

NOTES

V : SIGNAL VOLTAGE NECESSARY FOR OBTAINING 10W x2/8Ω OUTPUT POWER (1KHz)

V : DC VOLTAGE AT NO INPUT SIGNAL

RESISTORS

IN OHM, ¼W, ±5% TOLERANCE UNLESS OTHERWISE NOTED. K : KΩ, M : MΩ

CAPACITORS

IN μF UNLESS OTHERWISE NOTED P : pF

SWITCHES

S1 : FUNCTION
1. MIC/PHONO 2
2. PHONO 1
3. TUNER
4. AUX

S2 : DUPLICATE
OFF ⟷ ON

S3 : TAPE MONITOR
1. ⟵ SOURCE ⟶ 2.

S4 : MUTING
OFF ⟷ -20dB

S5 : LOUDNESS
OFF ⟷ ON

S6 : MODE
1. REVERSE
2. STEREO
3. L + R
4. L
5. R

S7 : LOW FILTER
OFF ⟷ ON

S8 : HIGH FILTER
OFF ⟷ ON

S9 : SPEAKERS
1. OFF
2. A
3. B
4. A+B

S10 : TONE
OFF ⟷ ON

S11 : POWER
OFF ⟷ ON

S12 : RELAY