


Chapman

lead with quality and elegance

FM91 VHF/FM

A no compromise VHF/FM Tuner containing every worthwhile feature. High sensitivity, cascade limiters, wide band ratio detector, tuning indicator. Temperature compensated Oscillator *PLUS* A.F.C.

Fully Tropicalised. Unpowered £23 8 0 Self-powered £27 7 6 inc. P.T.

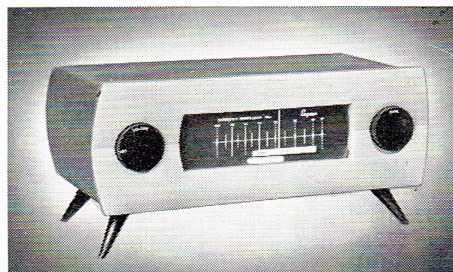

FM95 AM/FM



High quality VHF/FM reception *PLUS* excellent reception of Continental Stations on Medium and Long Waves. Ideal Tuner for domestic High Fidelity system.

Fully Tropicalised. Unpowered £27 2 6 Self-powered £31 2 6 inc. P.T.

FM90 VHF/FM Switched

Very sensitive, completely stable Tuner with similar specification to the FM91, but with 4 position switched Tuning and with 1v Cathode Follower Output.

Fully Tropicalised. Unpowered £19 10 0 inc. P.T.

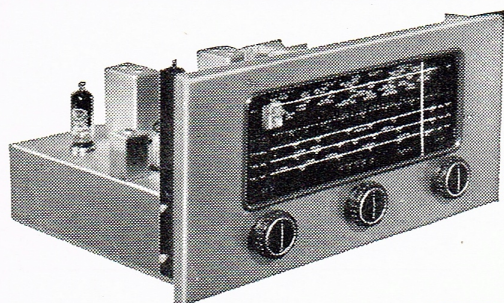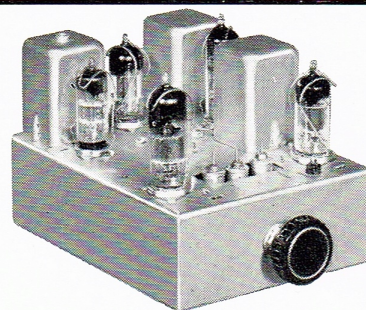

S5/FM S5E/FM AM/FM

These De Luxe AM/FM Tuners are in use in every country in the WORLD, where high quality long distance reception is required. With high gain VHF/FM the AM bands can be either 16-50 m., 195-550 m., 800-2000 m. S5/FM or 12.5-37 m., 35-100 m., 90-250 m., and 190-550 m., S5E/FM.


Fully Tropicalised. Unpowered £34 0 0 Self-powered £38 0 0 inc. P.T.

105 COMPLETE AMPLIFIER

Elegance and simplicity of styling coupled with outstanding performance are the keynotes of the 105.

Two P/U inputs, Radio, Tape, Tape Outlet, fitted fixed High Pass filter and three positions Low Pass filter, loudness control and every refinement for the enjoyment of High Fidelity reproduction from any input source.

Fully Tropicalised. £29 18 0

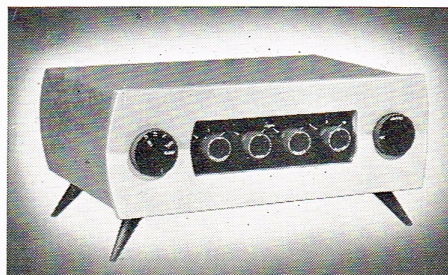

C. T. CHAPMAN (REPRODUCERS) LTD., HIGH WYCOMBE, BUCKINGHAMSHIRE, ENGLAND

Telephone: HIGH WYCOMBE 2474



Chapman

lead with quality and elegance

S6BS AM

The 9 band S6BS has been specially designed for World Wide long distance reception with high quality reproduction when connected to a wide range amplifier system. 6 Electrically band spread ranges — 11, 13, 16, 19, 25 and 31 m., and almost complete coverage from 13 m—570 m., on three bands. 3 Stage Variable Selectivity. Amplified Delayed A.V.C. Temperature Compensated Oscillator.

Fully Tropicalised. Unpowered £44 10 0 Self-powered £50 10 0 inc. P.T.

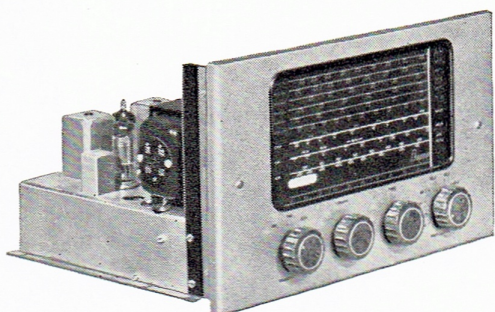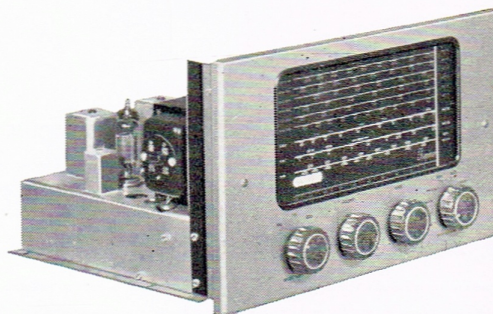

S6BS/FM

This is the finest Tuner in our range, and combines the circuits of the highly successful S6BS and FM 91 without any compromise on any range. The 9 band AM section covers 11 m—31 m in six electrically band spread ranges and from 13 m—570 m in three bands. Variable Selectivity giving 5 kc., 7 kc and 10 kc. Audio band width. Amplified Delayed A.V.C. Temperature Compensated Oscillator. The F.M. section with 2 μ v sensitivity, twin cascade limiters, temperature compensated oscillator plus A.F.C. and very high A.M. reject ratio.


Fully Tropicalised.

Supplied Self-powered. 110v and 200/250v £67 10 0 inc. P.T

305 STEREO CONTROL UNIT

A comprehensive stereo or single channel control unit, providing every facility for high quality radio, gram and tape reproduction. Tape input for direct tape head corrected C.C.I.R. (4.5 m/v) P/U input corrected R.I.A.A. (4.5 m/v) Radio 100 m/v. Aux. 100 m/v fitted pre-set. Supplied ready for use with 305 Main Amplifier or 2—205 30 watt Main Amplifiers.

Fully Tropicalised at 18 Gns.

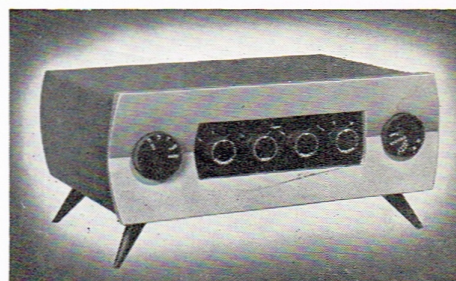

305 STEREO MAIN AMPLIFIER

A compact double channel push/pull amplifier using EL 84 valves in ultra-linear and rated at 8 watts over the range 30—20,000 c.p.s. Ample spare power available to feed 305 C.U. plus any of our Tuners.

Fully Tropicalised. 100/125v or 200/250v to order at 20 Gns.

INPUT SENSITIVITY: 350 m/V RMS 4 8 watts per channel.

POWER OUTPUT: 8 watts into 3 or 15 ohms.

DISTORTION: Harmonic at 8 watts less than 0.1% at 1 Kc.

VALVES USED: 2×ECC83, 4×EL84, 1×E281.

FINISH: Matt gold with black ventilated cover.

DIMENSION: 12"×7"×5".

C. T. CHAPMAN (REPRODUCERS) LTD., HIGH WYCOMBE, BUCKINGHAMSHIRE, ENGLAND

Telephone: HIGH WYCOMBE 2474